



TRIMCO Millwork 1835 Commerce Ave. Boise, ID 83705

Phone: 208-336-9000 • Fax: 208-384-1658 Toll Free: 1-800-733-0312 • www.trimcomillwork.com

A Division of Hoff Companies, Inc.

## TABLE OF CONTENTS

BASE MOULDING	2–4
CASING MOULDING	5–6
CROWN MOULDING	7–8
HEADER, CHAIR RAIL, DOOR STOP AND PANEL MOULDING	9–10
S4S MOULDING	11–12
MISCELLANEOUS MOULDING	13–16
MOULDING ACCESSORIES	17–28
JAMBS AND FRAMES	29
CUSTOM BUILD-UPS	31–36
DOORS	37–38
PORCH POSTS	39
	40

# Our Mission...

To be the first choice supplier for our customer's millwork and finish products needs. Our skilled employees, each with a desire to excel, will provide quality products at competitive prices and deliver superior service to build lasting relationships with customers and vendors.



#### BASE MOULDING PROFILES

#### BASE MOULD

**BASE MOULDINGS:** APPLIED WHERE FLOOR AND WALLS MEET, FORMING A VISUAL FOUNDATION. PROTECTS WALLS FROM KICKS, BUMPS, FURNITURE, ETC. BASE MAY BE REFERRED TO AS ONE, TWO, OR THREE-MEMBER. BASE SHOE AND BASE CAP ARE USED TO CONCEAL UNEVEN FLOOR AND WALL JUNCTIONS.



TM 726 9/16 x 2-1/4 FJ 16' H RL



TM 735 9/16 x 2-1/4 FJ 16'



TM 622 7/16 x 2-1/2 MDF 16'



TM 725 9/16 x 2-1/2 FJ 16' SP RL



TM 1213 1/2 x 3-1/8 KA RL



TM 411 9/16 x 3-1/4 FJ 16' MDF 16'



TM 433 9/16 x 3-1/4 FJ 16' H RL MDF 16'




TM 444 11/16 x 3-1/4 FJ 16' H RL SP RL OV 16' KA RL

5/8 x 3-1/4 MDF 16'

1/2 x 3-1/4 O RI

7/16 x 3-1/4 M RL





TM 445 11/16 x 3-1/4 FJ 16'



TM 623 9/16 x 3-1/4 FJ 16' H RL KA RL MDF 16' 1/2 x 3-1/4 O RL



TM 683 5/8 x 3-1/4 **FJ** 16'



TM 713 9/16 x 3-1/4 FJ 16' H RL SP RL O RL



TM 730 9/16 x 3-1/4 FJ 16' H RL MDF 16'



TM 753 9/16 x 3-1/4 FJ 16'




TM 832 5/8 x 3-1/4 FJ 16'



TM 852 9/16 x 3-1/4 FJ 16'


#### BASE MOULDING PROFILES

#### BASE MOULD

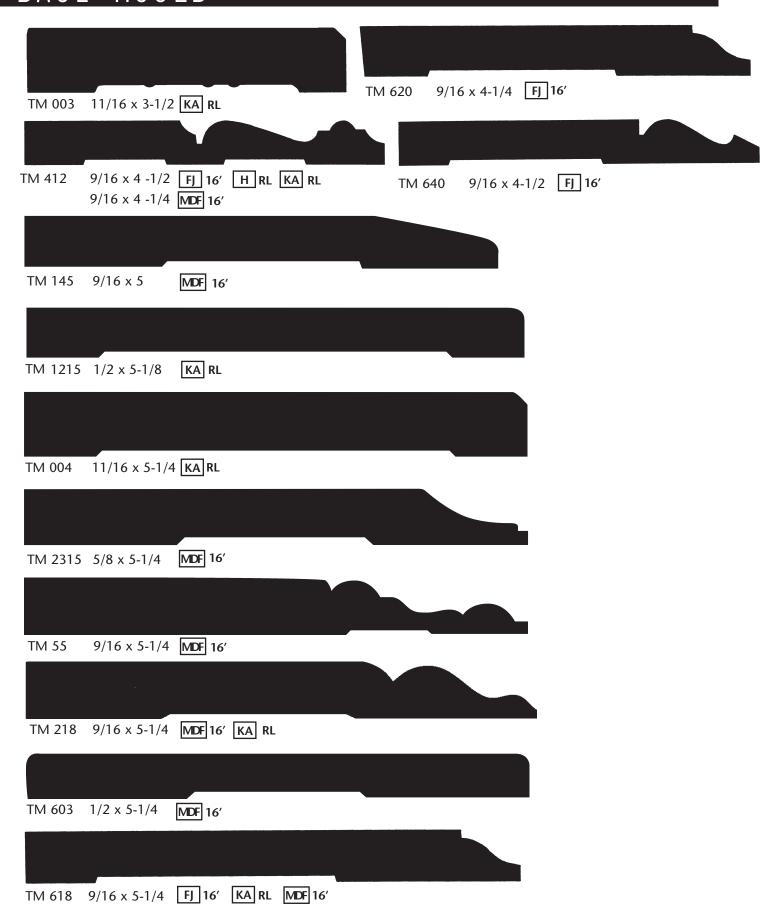

#### BASE MOULDING PROFILES


## BASE MOULD

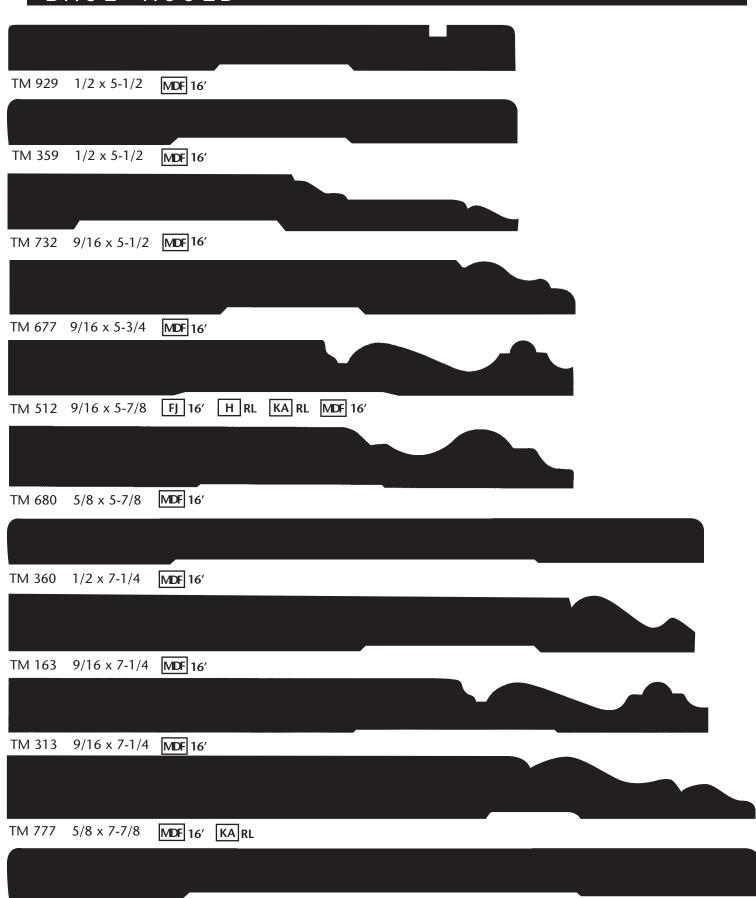

TM 366 1/2 x 11-1/4 MDF 16'

<sup>•</sup> FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Prine • KP = Knotty Prine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRIM = Primed • MDF=Medium Density Floetboard • MDF-UL = MDF-Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber


#### CASING MOULDING PROFILES

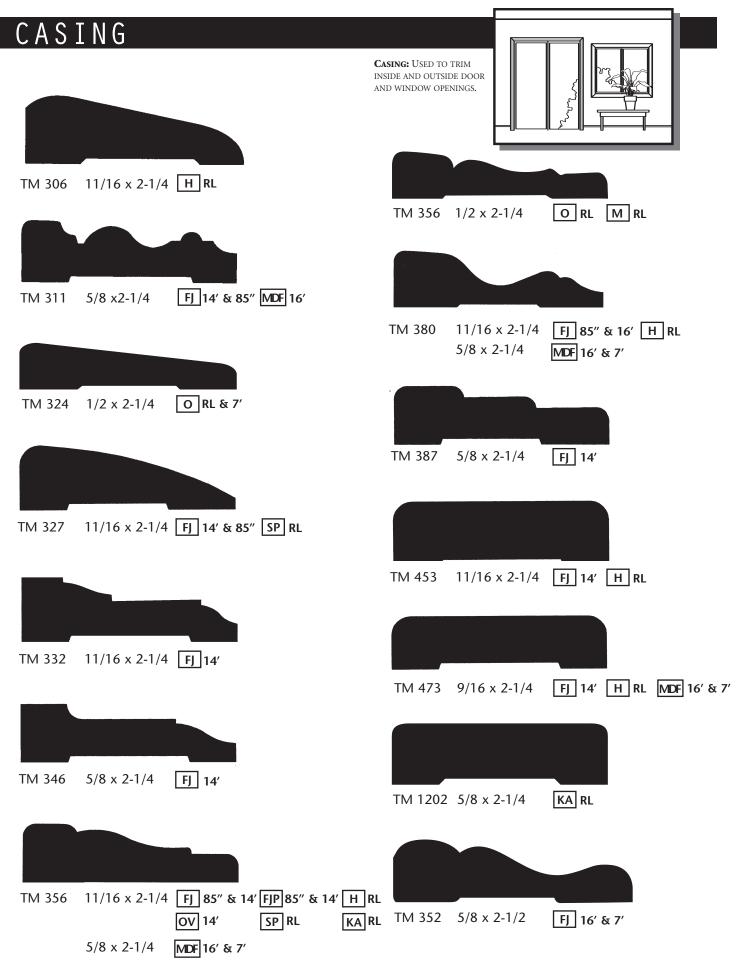


#### CASING MOULDING PROFILES

#### CASING TM 56 $5/8 \times 3$ MDF 16' TM 377 11/16 x 3-1/4 MDF 16' TM 413 11/16 x 3-1/4 MDF 16' MDF 16' TM 245 11/16 x 3 11/16 x 3-1/4 TM 532 MDF 16' FJ 16' H RL TM 312 11/16 x 3 KA RL MDF 16' & 85" $5/8 \times 3$ TM 302 1/2 x 3-1/2 MDF 16' TM 513 11/16 x 3 MDF 16' 13/16 x 3-1/2 **KA RL** TM 001 KA RL TM 1203 5/8 x 3-1/8 MDF 16' TM 344 1 x 4 TM 37 9/16 x 3 -1/4 | FJ | 16' 11/16 x 3 -1/4 0 8' 9/16 x 3 -3/16 MDF 16' MDF 16' KA RL TM 353 9/16 x 3-1/4 MDF 16' TM 374 1-1/8 x 4 O 90" P 8' 11/16 x 5-1/2


TM 162

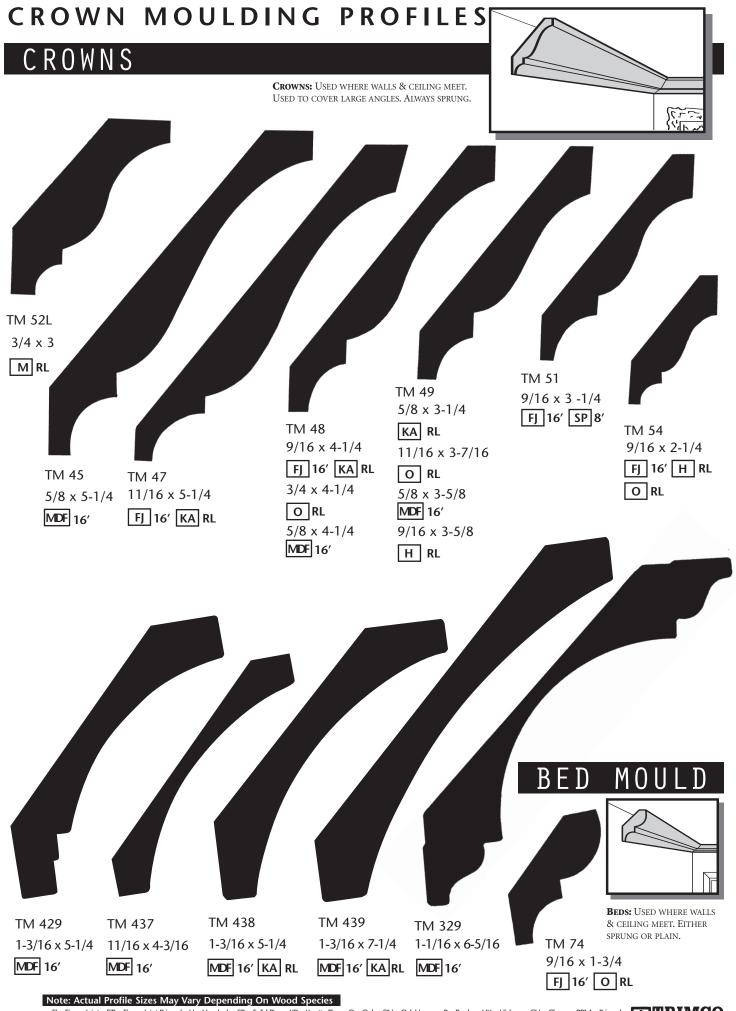


#### CROWN MOULDING PROFILES

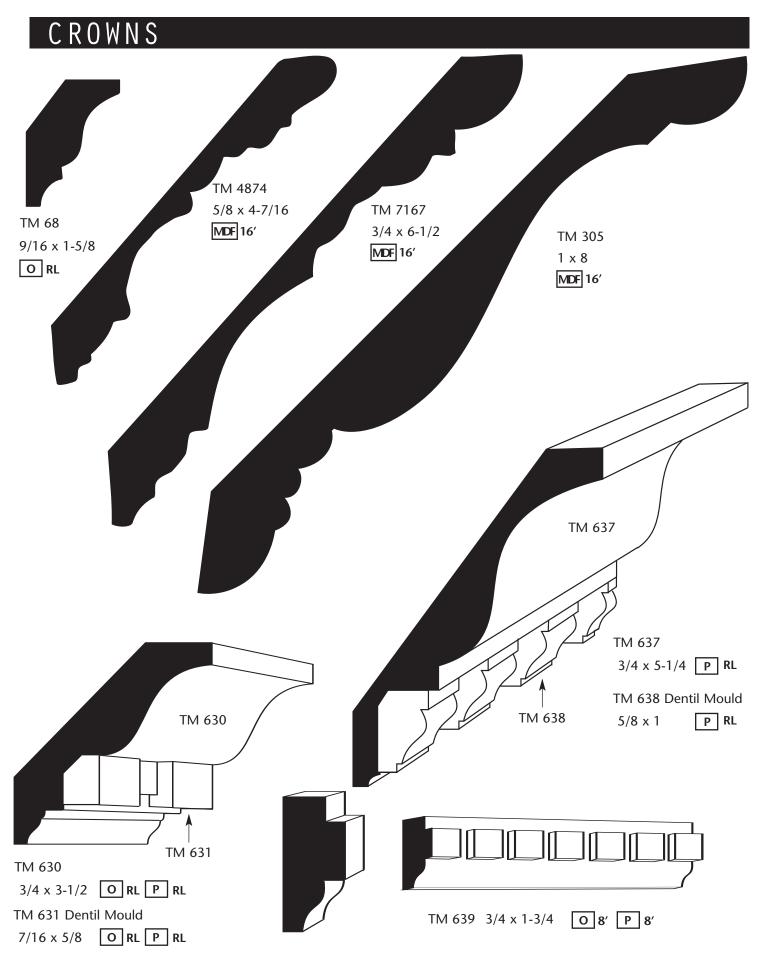

#### HEADER MOULDING PROFILES

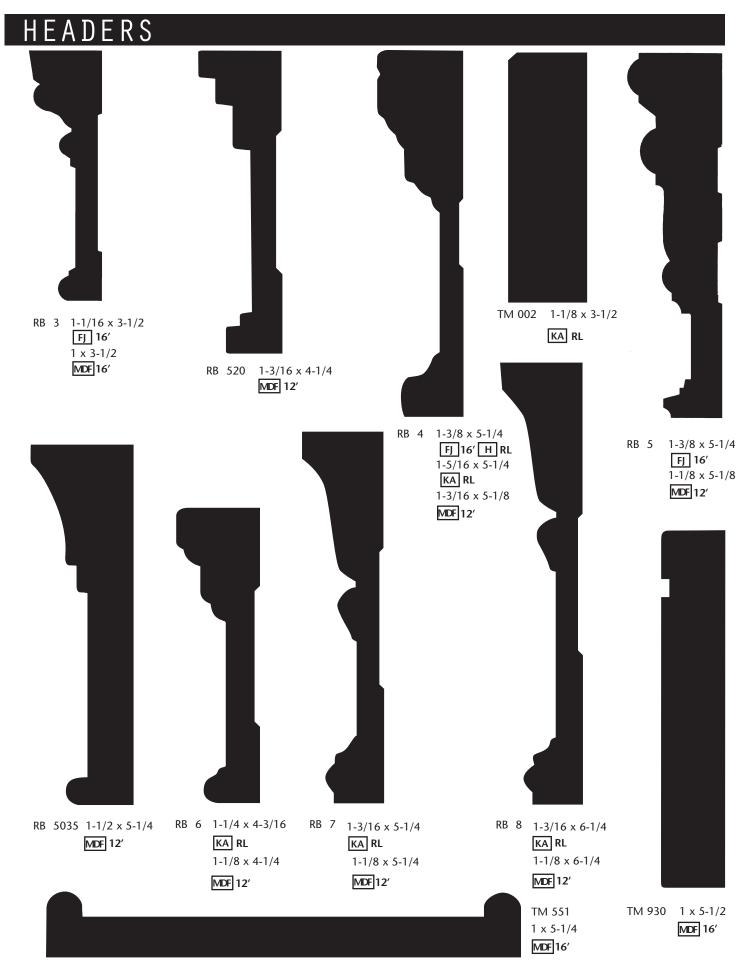



#### CHAIR RAIL PROFILES



TM 391 9/16 x 1-3/4 **FJ** 16'




TM 719 3/4 x 2-1/2 O RL



TM 390 11/16 x 2-5/8 **FJ** 16' **H RL** 5/8 x 2-5/8 MDF 16'

CHAIR RAIL: INTERIOR MOULDING APPLIED ABOUT ONE THIRD UP FROM THE FLOOR, PARALLELING BASE MOULDING AND ENCIRCLING THE ROOM. ORIGINALLY USED TO PREVENT CHAIRS FROM MARRING WALLS. USED TODAY AS A KEY DECORATIVE DETAIL IN TRADITIONAL AND COLONIAL DESIGN.







FJ 16' KA RL MDF 14' TM 304 5/8 x 3

#### DOOR STOP PROFILES

DOOR STOPS: IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS.





TM 817 7/16 x 1-1/4 FJ 16' & 7' TM 877 7/16 x 1-1/4 FJ 16' & 7' FJP 7'







H RL & 7' SP 7' TM 937 7/16 x 1-1/4 FJ 16' & 7' H RL & 7'

3/8 x 1-1/4 **O** 7'

KA RL

#### PANEL MOULDING PROFILES

#### PANEL MOULD








TM 182 11/16 x 1-5/8 **FJ** 16'



FJ 16' O RL M RL KA RL



# S4S STOCK MOULDING PROFILES STOCK SCREEN/S4S STOCK: SAME BASIC USES AS SQUARES. TM 239 TM 254 TM 249 11/16 x 11/16 1/2 x 3/4 11/16 x 1-5/8 FJ 16' FJ 16' SP RL 11/16 x 1-3/4 H 16' 3/4 X 1-1/2 0 16' S4S 1x2 S4S 1x3 S4S 1x3 S4S 1x4 S4S 1x5 S4S 1x6 11/16 x 5-1/4



11/16 X 1-1/2

MDF 16'

3/4 X 1-5/8

KA RL

11/16 x 2-1/2

MDFUL 16'

11/16 x 2-3/4

FJ 16'

11/16 x 3-1/2

FJ 16' H RL VGH RL FJ 16' H RL 3/4 x 3-1/2

KA RL SA RL O RL

MDF 17'

11/16 X 3-1/2

MDFUL 16'

3/4 x 3-1/2 P RL

11/16 x 4-9/16

3/4 X 4-11/16 MDF 17'

11/16 x 4-11/16 MDFUL 16'

FJ 16'

3/4 x 5-1/2 KA RL SA RL

MDF 17' O RL


11/16 x 5-1/2

MDFUL 16' H RL VGH RL

3/4 x 5-1/2


P RL





#### S4S STOCK MOULDING PROFILES

# S4S STOCK

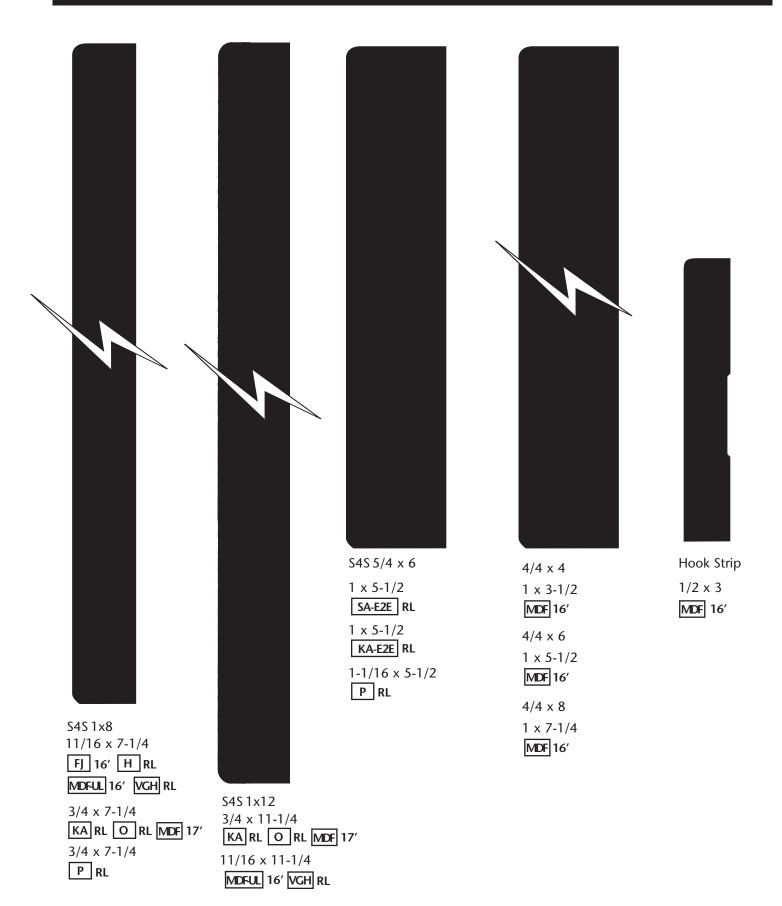


#### CHAMFER STRIP



TM 995 11/16 x 11/16 SP RL

CHAMFER STRIP: USED IN HIGHWAY AND DAM CONSTRUCTION FORMS, MAKING A CHAMFERED EDGE AT CONCRETE CORNERS. ALSO USED WHERE KITCHEN CABINET TOPS MEET THE WALL. ALSO USED AS A LINOLEUM COVE (UNDER LINOLEUM WHERE IT EXTENDS UP THE WALL.)






#### BRICK MOULD



TM 180 1-1/4 x 2 FJ 7' KA RL

FJP 18' & 7'


1-3/16 x 2 H RL




BRICK MOULD: USED AS AN EXTERIOR DOOR AND WINDOW CASING. A THICK MOULDING PROVIDES A SURFACE FOR BRICK OR OTHER SIDING TO BUTT AGAINST.

#### BAND

RABBETED MOULDING. USED TO SURROUND THE OUTSIDE EDGE OF CASING.



TM 281 11/16 x 1-1/8



#### PICTURE

USED TO SUPPORT HOOKS FOR PICTURE HANGING



TM 273 11/16 x 1-3/4 H RL



## BASE CAPS



TM 164 11/16 x 1-1/8 H RL




TM 167 11/16 x 1-1/8




TM 163 11/16 x 1-3/8

O RL



A DECORATIVE PIECE INSTALLED FLUSH AGAINST WALL AND AT THE TOP OF AN S4S BASEBOARD. ALSO USED AS PANEL MOULDING.

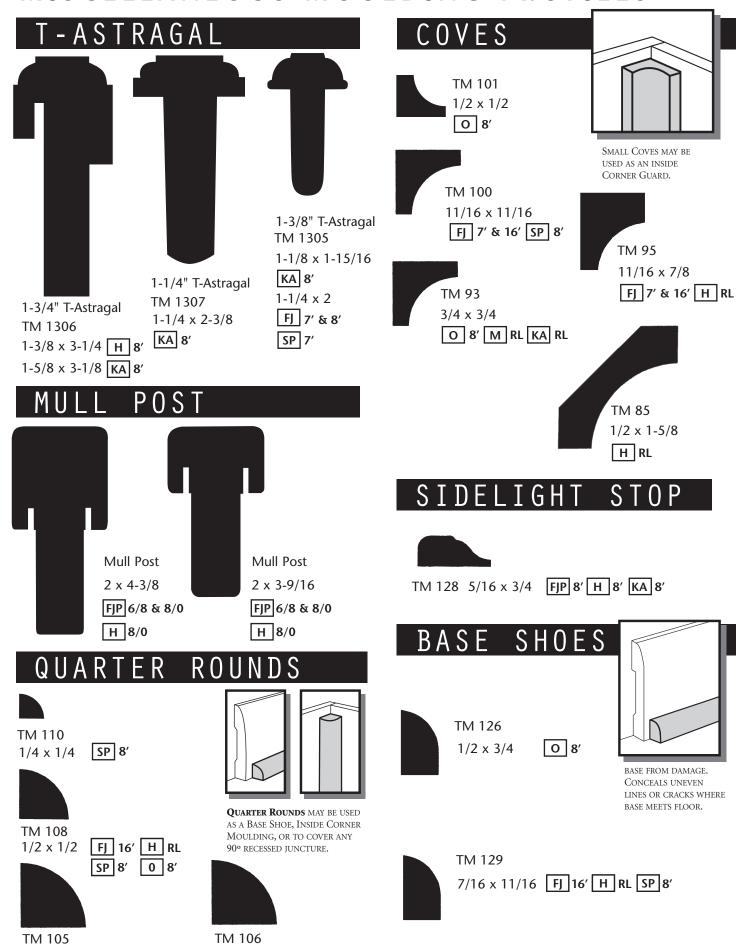

3/4 x 3/4 0 8'

11/16 x 11/16 FJ 16' H RL SP 8'

#### \_F EDGE/SCREEN MOULD




TM 142 5/16 x 3/4 FJ 16'

1/4 x 3/4 SP RL O 8' H RL




TM 144 1/4 x 3/4 H RL

**SCREEN MOULD: COVERS** SEAM WHERE SCREENING IS FASTENED TO THE SCREEN FRAME.



SHELF EDGE: ALSO COVERS PARTICLE OR FLAKEBOARD SHELF EDGES.



#### HAND RAIL



TM 231 1-1/2 x 1-11/16 H 16' PRM 16' & 18' TM 240 1-1/4 x 2-1/4 H RL









HAND RAIL: USED AS A HAND SUPPORT IN A STAIRWELL.

## CORNER GUARDS



TM 206 11/16 x 11/16 FJ 16' 3/4 X 3/4 O 8'

**CORNER GUARDS:** OUTSIDE (OS) CORNER GUARD IS USED TO PROTECT CORNERS OR TO COVER RAGGED EDGE WHERE WALL COVERING AND PAINTED SURFACES MEET AT OUTSIDE CORNER.



USED AS A SCREEN MOULDING, BEAD SHELF EDGE OR PANEL MOULDING.



TM 120

 $1/2 \times 1$ 

SP RL

#### ROUND



ROUNDS: MOST OFTEN USED AS A CLOSET POLE OR ROOM DIVIDER.

TM 233

1-1/4




#### CORNER MOULD

Universal Corner Mould used for radius corners.



## COUNTER EDGE

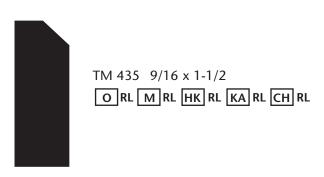

#### TM 265 9/32 x 1-3/4 LATTICE: ORIGINALLY USED IN TRELLIS FJ 16' WORK. THIS SMALL, PLAIN S4S MOULDING 9/32 x 1-5/8 TM 267 TM 268 IS AMONG THE MOST VERSATILE OF PROFILES. H RL 9/32 x 1-3/8 9/32 x 1-1/8 1/4 x 1-3/4 0 8' FJ 16' H RL FJ 16' H RL SP RL

# SHELVING & SHEET GOODS

SUPER SHELF	
DESCRIPTION	SIZE
#45 Super Shelf — 3/4"	12″ X 97″
#45 Super Shelf — 3/4"	12" X 145"
#45 Super Shelf — 3/4"	16" X 97"
#45 Super Shelf — 3/4"	16" X 145"
#45 Super Shelf — 3/4"	24" X 145"

COUNTERTOP	
DESCRIPTION	SIZE
#45 Countertop — 3/4"	25" X 145"


MDF SHEET STOCK		
THICK	SIZE	
1/4"	49" x 97"	
1/2"	49" x 97"	
3/4"	49" x 97"	
3/4"	49" x 121"	
1-1/8"	49" x 97"	

BEAD BOARD

Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	1-1/2"
3/16" x 4' x 8'	Primed	2"

Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	3"

# V - G R O O V E

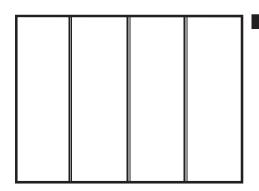

Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	4"


Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	6"


Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	8"

# WAINSCOT




#### PANEL CAP

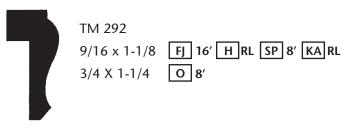



PANEL/PLY CAP: TURNS OUT THE UPPER EDGE OR TOP OF A WAINSCOT. COVERS PLYWOOD'S ROUGH SANDWICH EDGE IN INSTALLATIONS WHERE IT IS EXPOSED TO VIEW. ALSO CALLED A DADO CAP.

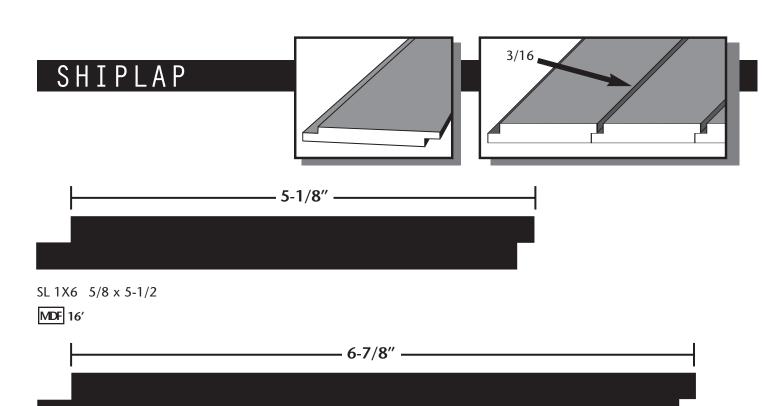


SL 1X8 5/8 x 7-1/4


MDF 16'

# FYPON ACCESSORIES

# STONE & TIMBER COLLECTION

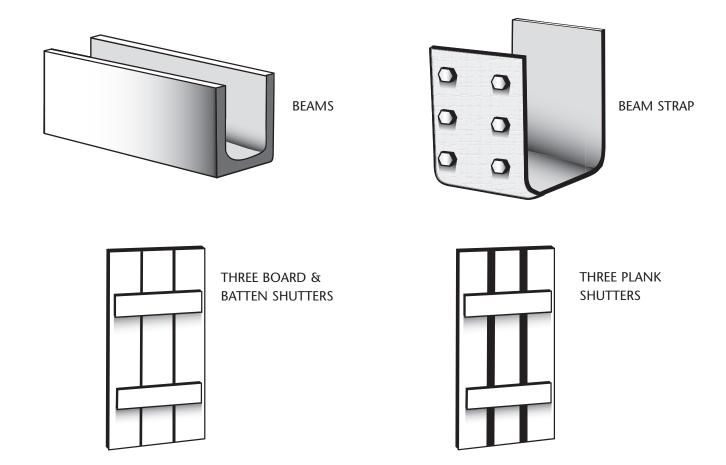

# COLONIAL COLLECTION

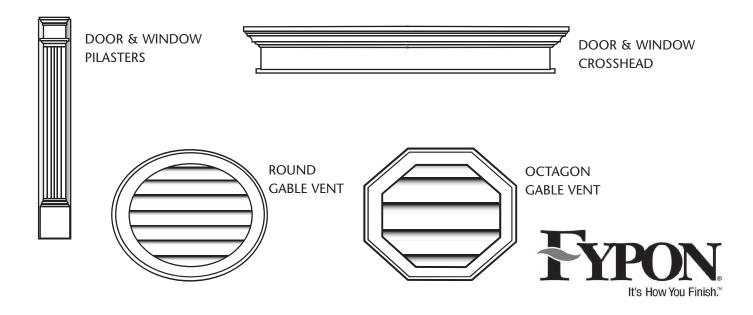




#### FLEXIBLE MOULDING

# $3/4 \times 5 - 1/2$ $3/4 \times 3 - 1/2$ 9× × 4

#### TRUE RADIUS MATERIAL LENGTH CHART

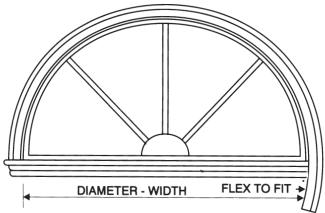

#### RADIUS LENGTH CONVERSION TABLE

#### **OUR STANDARD DIAMETER LENGTHS**

2/4 DIAMETER = 5.166 LINEAL FOOT 3/0 DIAMETER = 6.333 LINEAL FOOT 4/0 DIAMETER = 7.916 LINEAL FOOT 5/0 DIAMETER = 9.500 LINEAL FOOT 6/0 DIAMETER = 11.00 LINEAL FOOT

#### **OUR CUSTOM DIAMETER LENGTHS**


1/6 DIAMETER = 4.000 LINEAL FOOT 2/0 DIAMETER = 4.750 LINEAL FOOT 2/6 DIAMETER = 5.583 LINEAL FOOT 2/8 DIAMETER = 6.000 LINEAL FOOT 3/4 DIAMETER = 6.833 LINEAL FOOT 3/6 DIAMETER = 7.333 LINEAL FOOT 4/4 DIAMETER = 8.333 LINEAL FOOT 4/6 DIAMETER = 8.833 LINEAL FOOT

#### **FLEXIBILLITY NOTES**

A 2/4 diameter will expand to 2/6 or contract to 2/0 A 3/0 diameter will expand to 3/6 or contract to 2/6 A 4/0 diameter will expand to 4/6 or contract to 3/6 A 5/0 diameter will expand to 5/6 or contract to 4/6 A 6/0 diameter will expand to 6/6 or contract to 5/0

Flexible expansion and contraction may vary when molding width is over 3 1/2 inches.


# PLINTH BLOCKS BULLSEYE DESIGN

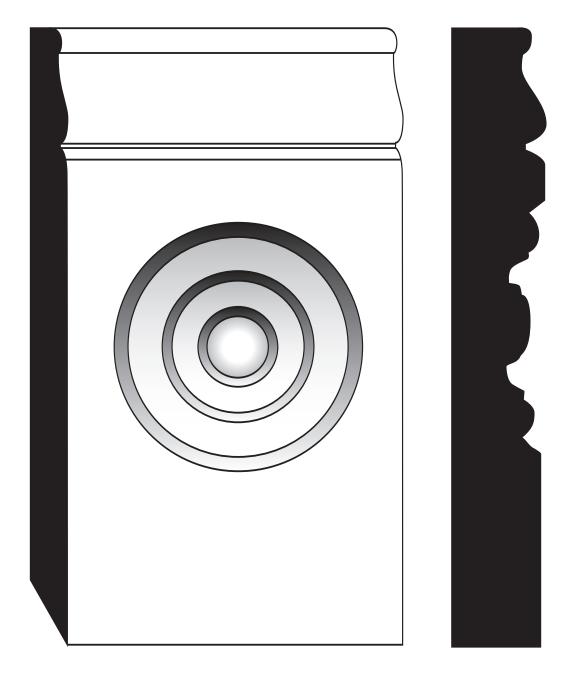

1 x 3-1/2 x 6-1/2

MDF


# PLINTH BLOCKS

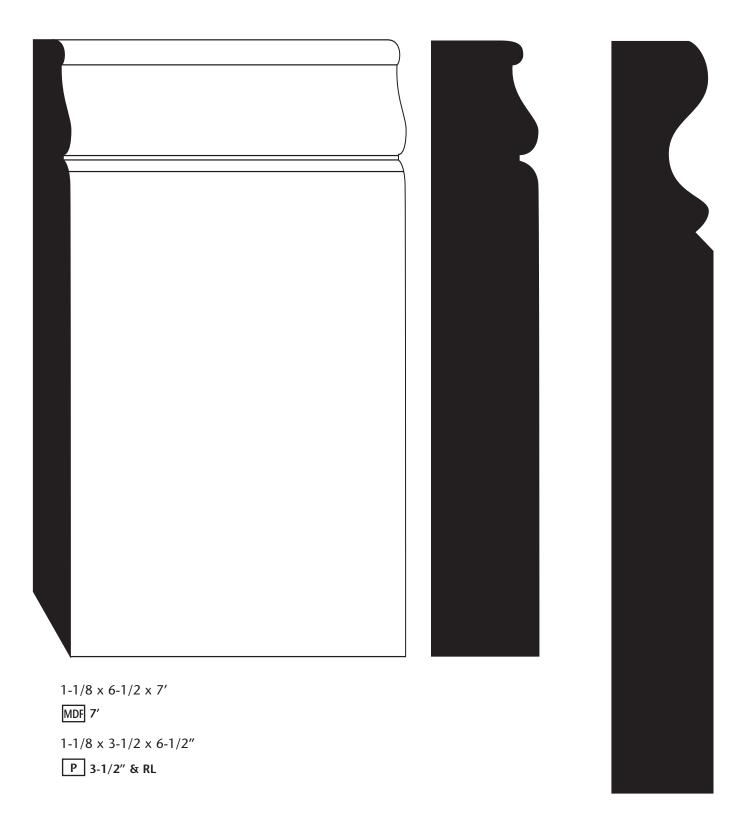


1-1/16 x 7-7/8

KA RL


# CORNER BLOCKS BULLSEYE DESIGN

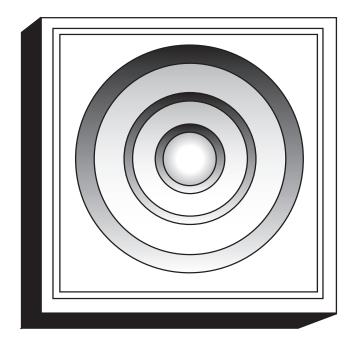

1 x 3-1/2 MDF 13/16 x 3-1/2 O M

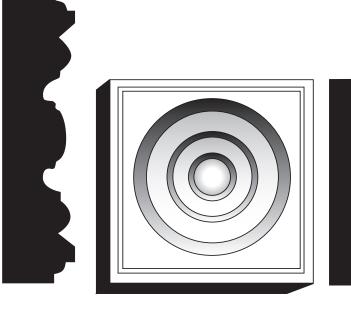


3/4 x 2-1/2 O M 1 x 2-1/2 MDF

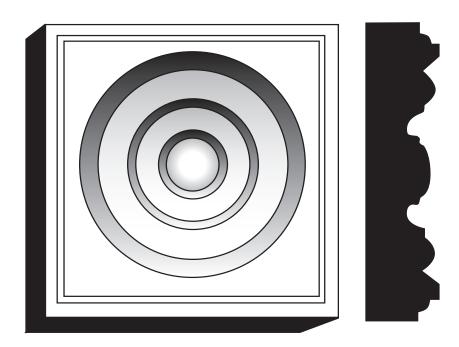

7/8 x 3-1/2 SP


#### CORNER NSIDE

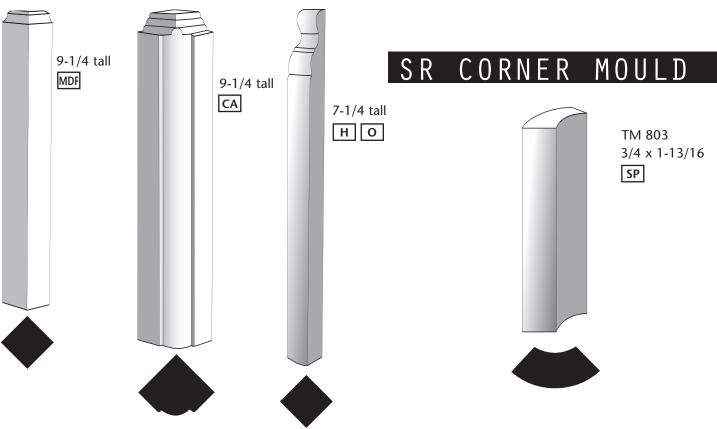


# UNIVERSAL OUTSIDE CORNER 9-1/4 tall MDF 9-1/4 tall CA 7-1/4 tall НО

# RADIUS CORNERS TM 356 5/8 x 2-1/4 MDF 11/16 x 2-1/4 H TM 411 **H** MDF TM 444 11/16 x 3-1/4" 9/16 x 3-1/4" 5/8 x 3-1/4" MDF TM 312 H 11/16 x 3" TM 730 **H** MDF TM 852 H TM 623 H MDF TM 412 9/16 x 4-1/2" Н 9/16 x 3-1/4" 9/16 x 3-1/4" 9/16 x 4-1/4" 9/16 x 3-1/4 MDF

# RADIUS CORNERS

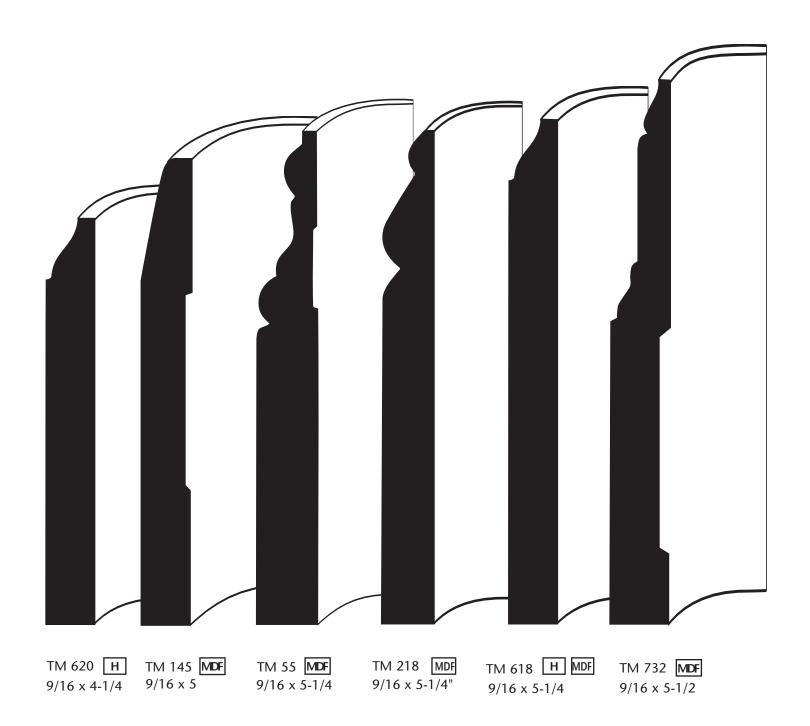

# RADIUS CORNERS

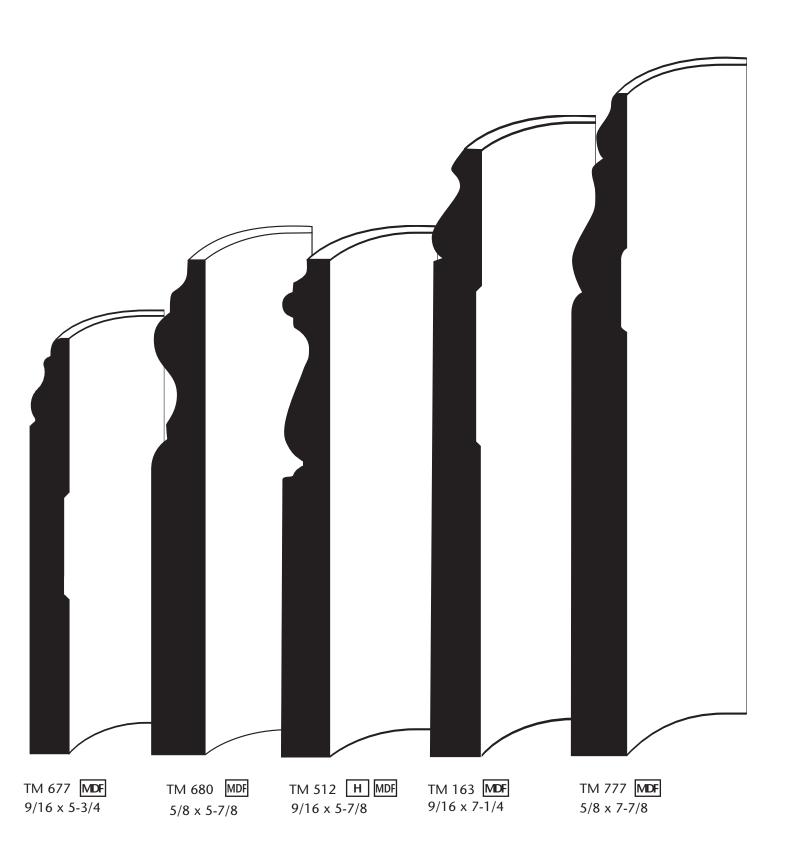

#### TRIM-FIT MDF CROWN CORNERS

# PRE-MANUFACTURED CROWN CORNERS



#### **EASY INSTALLATION**

Measure wall from corner to corner and subtract the appropriate crown dimension listed below from measurement:

#### **CUTBACK FOR EACH**




Trim-Fit #	Crown Width	Inside Corner	Outside Corner
TM49	3-5/8"	3"	5/8"
TM48	4-1/4"	3-1/4"	5/8"
TM45	5-1/4"	4"	5/8"
TM329	6-5/16"	5"	5/8"

Outside Corner

Keystone (Splice Cover)

TRIM-FIT  $^{\text{TM}}$  Crowns are manufactured to fit the following TRIMCO profiles:

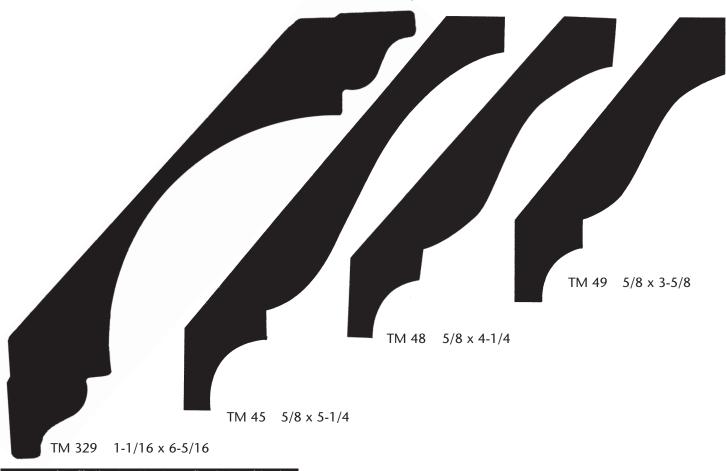

# INTERIOR JAMBS & EXTERIOR FRAMES

#### **Interior Flat Jamb**



#### **Kerf Flat Jamb**



3-1/2 FLAT JAMBS W/SHEETROCK KERF	82-1/4"	86-1/4"	98-1/4"
FJ RAW	Х		Х
4-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×		Х
FJ PRIMED	×		
KNOTTY ALDER	×		Х
HEMLOCK SOLID	×		
HEMLOCK VENEER	×		Х
SOLID PINE	Х		
OAK VENEER-LUAN Substrate	×		
MDF MEDITE PRIMED	Х		
4-7/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×		Х
HEMLOCK SOLID	Х	Х	
OAK VENEER-LUAN Substrate	×		
SOLID PINE			Х
KNOTTY ALDER	Х		Х
5-1/4 FLAT JAMBS	82-1/4"	86-1/4"	
FJ RAW	×		
HEMLOCK SOLID	X		
6-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	X	X	Х
HEMLOCK SOLID	×		Х
KNOTTY ALDER	×		Х
PINE VENEER	Х		
7-1/4 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	Х		
HEMLOCK SOLID	Х	Х	
KNOTTY ALDER			Х

#### **Exterior Blank**



#### **Exterior SCSK**



1-1/4 X 4-5//8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK	01-5/0	X	04	0/-1/2	97-5/6	99
		X				
FJ RAW BLANK HEMLOCK SOLID SCSK		X		<del>                                     </del>		
		^		<del>                                     </del>		
FJ PRIMED BLANK	Х			<del>                                     </del>	Х	
KNOTTY ALDER SK			Х			
1-1/4 X 4-3/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х			/	
1-1/4 X 4-7/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW BLANK				Х		
1-1/4 X 5-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х				L
FJ RAW SK				_		X
FJ RAW BLANK		X				X
HEMLOCK SOLID SCSK		Х		<del>                                     </del>		
HEMLOCK SOLID SK				<del>                                     </del>		X
HEMLOCK SOLID BLANK		Х			/	
1-1/4 X 6-5/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		X		<del>                                     </del>	, , ,	X
FJ PRIMED BLANK	Х	X		<del>                                     </del>	X	Х
HEMLOCK SOLID SCSK				<del>                                     </del>		_^
HEMLOCK SOLID BLANK KNOTTY ALDER SK		Х		_		
1-1/4 X 7-1/4 EXTERIOR FRAMES			Х			Х
(2-14" Thick Doors)	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
KNOTTY ALDER SK						Х
1-1/4 X 7-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х				
FJ RAW SK						Х
FJ RAW BLANK		Х		-		_
HEMLOCK SOLID SCSK		Х				
HEMLOCK SOLID SK						Х
HEMLOCK SOLID BLANK						Х
KNOTTY ALDER SK						Х
1-1/4 X 8-1/2 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SK				Х		Х
HEMLOCK SOLID SK						Х
KNOTTY ALDER SK						Х

<sup>\*</sup> SCSK = Sill Cut/Saw Kerf

SK = Saw Kerf


FJP = Finger Joint Prime

**KP** = **Knotty Pine** 





THE ULTIMATE FLOORING EXPERIENCE

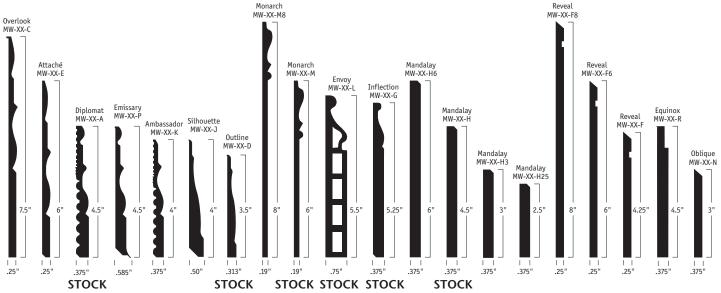

MILLWORK CHAIR RAIL

All Millwork profiles in wall base, chair rails and corner guard are available in standard 8' lengths.








MILLWORK CORNER GUARD

MILLWORK CORNER GUARD .25" ☐ 1.250" | 1.250" | 1.250" |

MILLWORK ACCESSORIES




HIGH PERFORMANCE COMES IN MANY SIZES AND SHAPES.


People are happiest when all the dots are connected. That's why the Millwork Wall Finishing System includes more than 23 elements in all:


20 contoured wall base profiles, 3 chair rail profiles, a corner guard, self-stick quarter round and shoe moulding.


It's a system that can eliminate concerns of mismatched wood or variations in color. Johnsonite carefully coordinates profile designs and quarantees color consistency from one batch to another, from one year to the next.


## MOUNTAIN HERITAGE

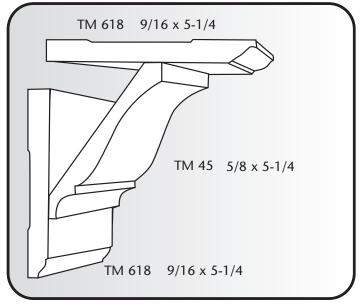


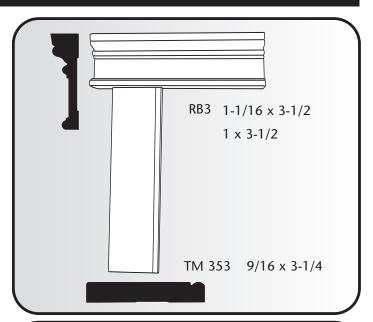

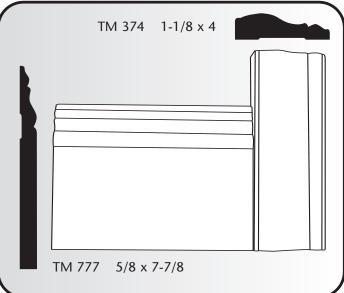


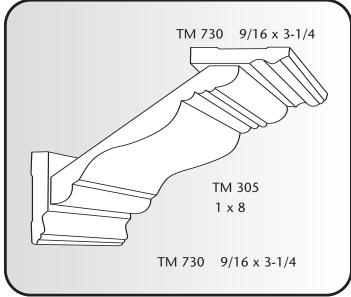


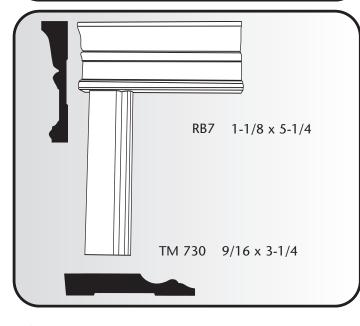


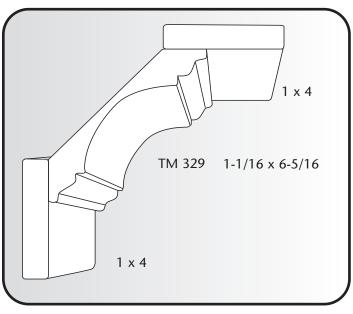


# MODERN COLONIAL

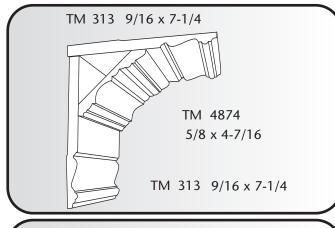


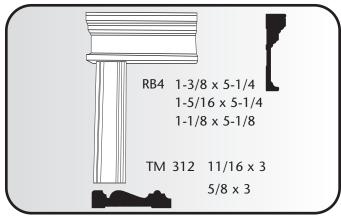


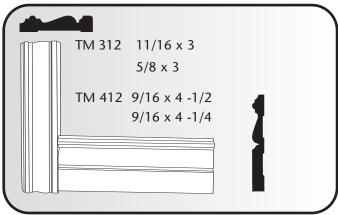


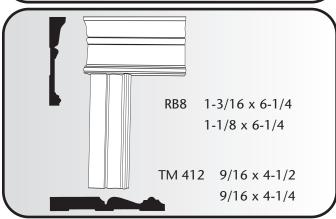


# CRAFTSMAN

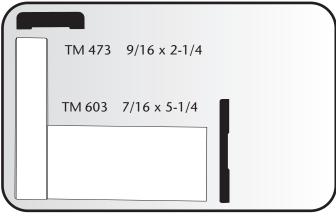


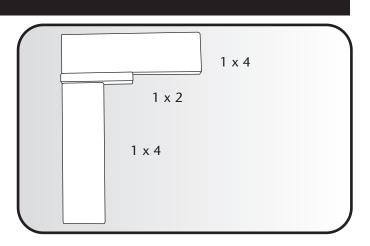


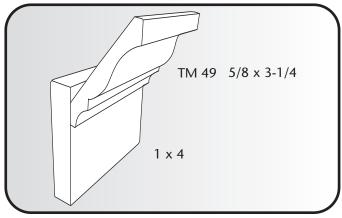



# CLASSIC COLONIAL

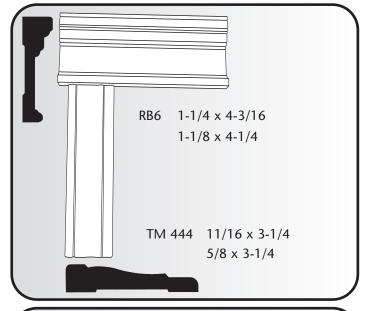


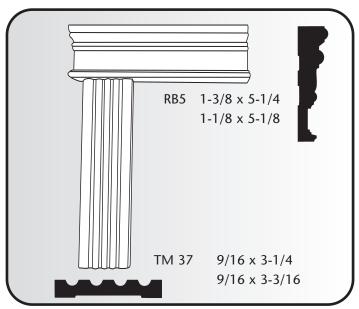

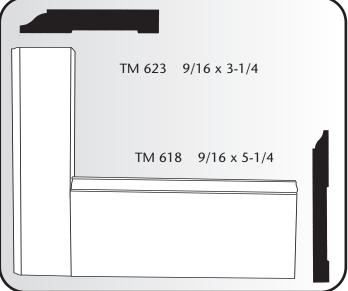


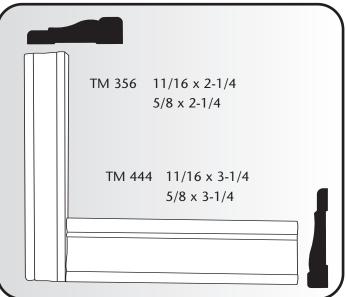


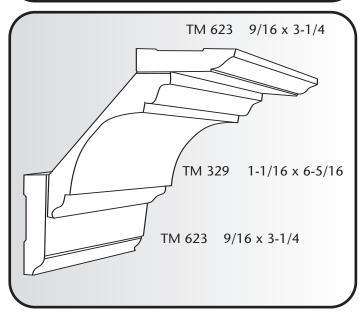


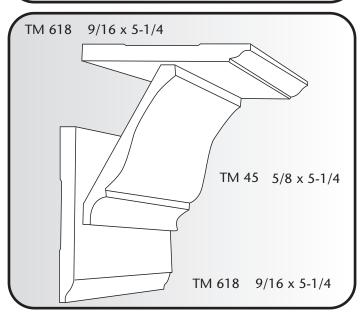



# CONTEMPORARY

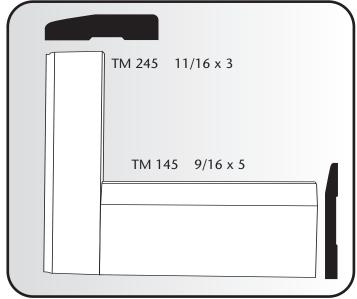


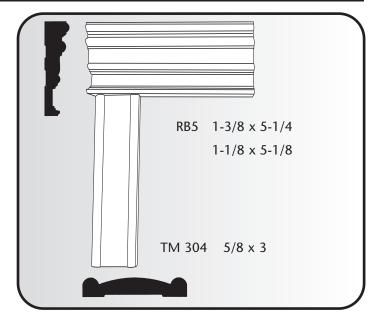

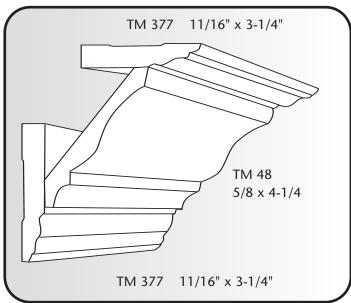


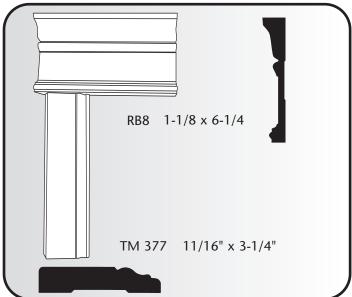


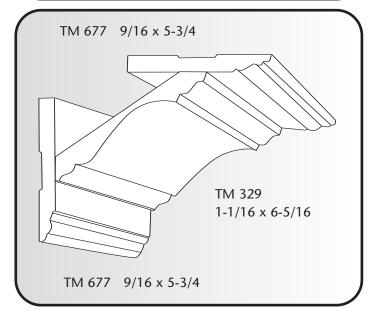

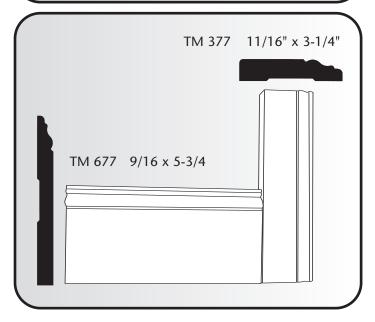


# PRE-MANUFACTURED CROWN CORNER BUILD-UPS

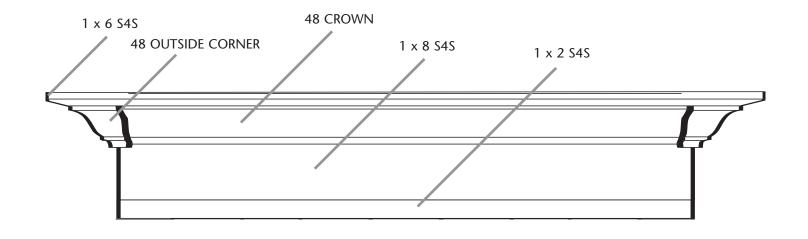


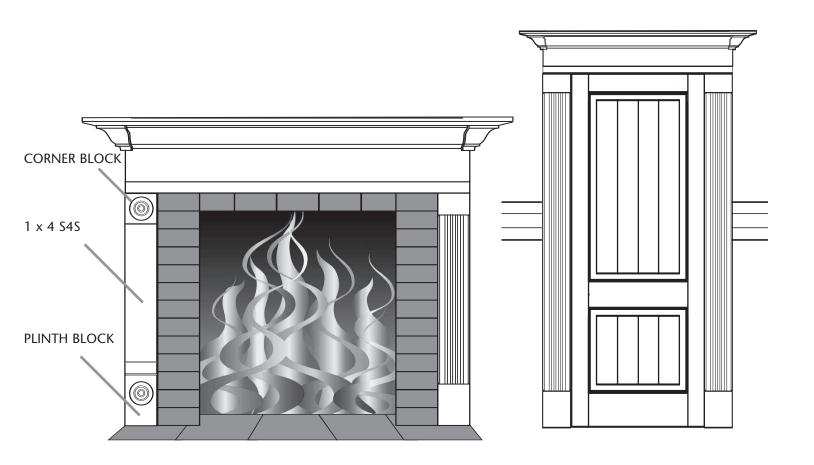



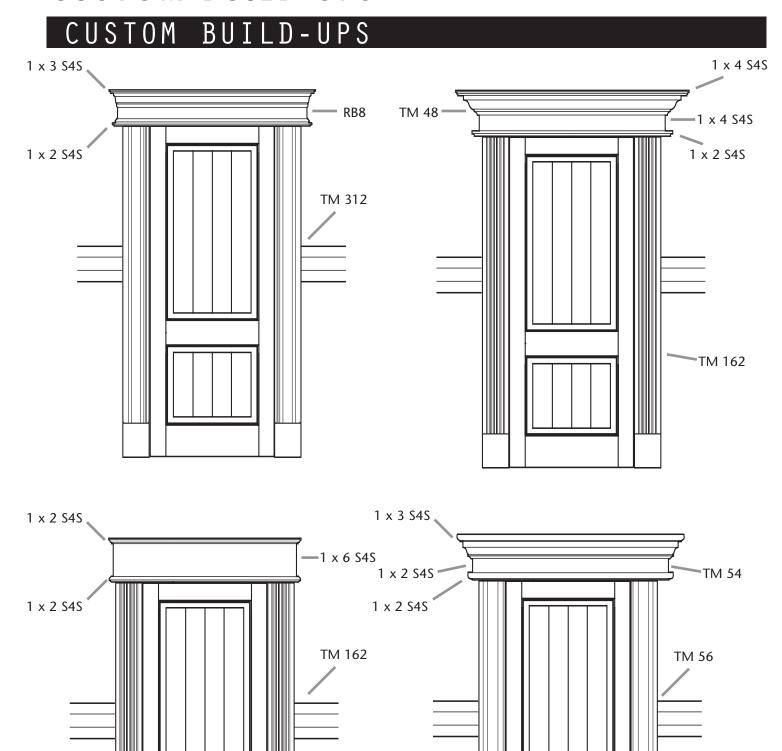

# LYNDEN INTERIOR DOOR STILES

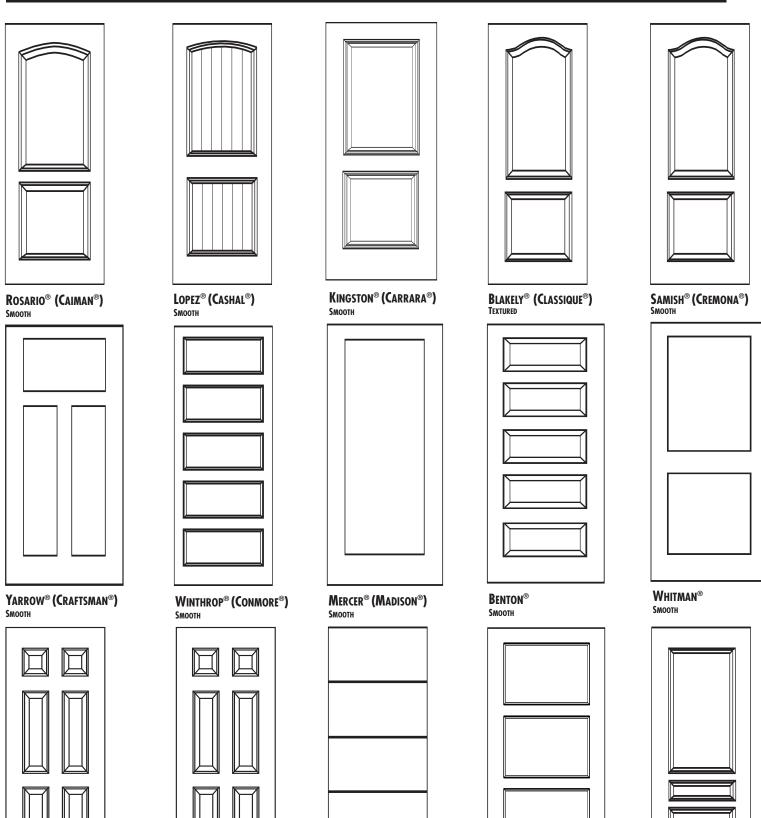

COLUMBIA® (COLONIST®)
SMOOTH



**DENMAN®** 

**S**моотн

**ABERDEEN®** 


**S**моотн


BONNEVILLE® (COLONIST®)


**TEXTURED** 

WESTPORT® (CLERMONT®)

# WOOD DOORS

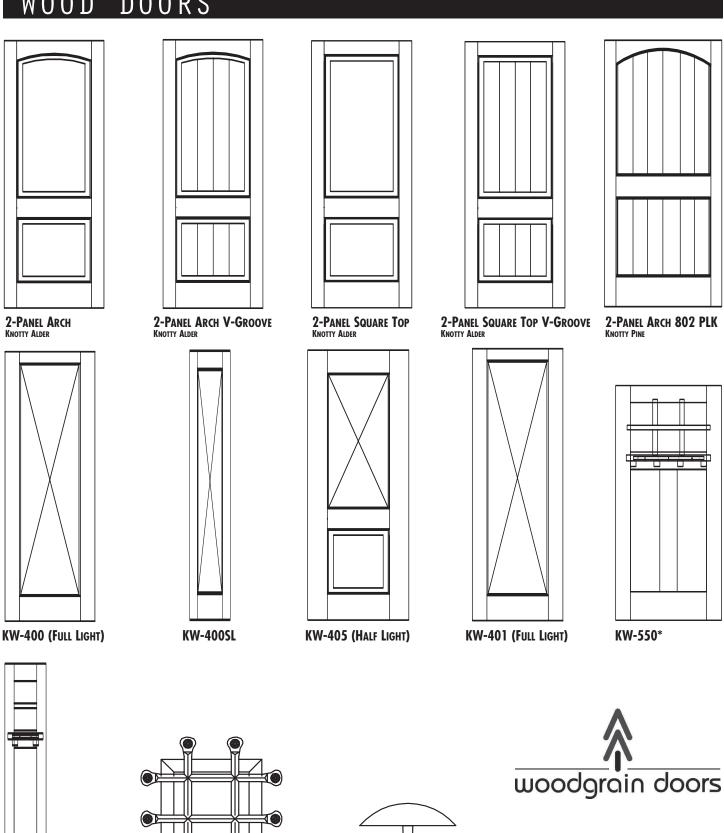








KW-552\*

<sup>\*</sup> SHOWN WITH OPTIONAL DENTIL SHELF

# PORCH POSTS

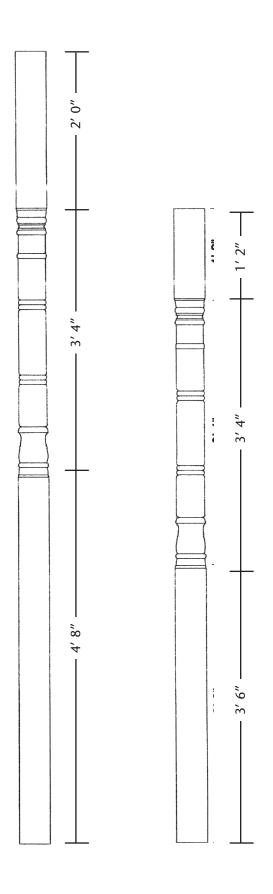

#### Paint Grade Wood Porch Posts

4" x 4" x 8' Colonial 4" x 4" x 10' Colonial 5" x 5" x 8' Colonial 5" x 5" x 10' Colonial 6" x 6" x 8' Colonial 6" x 6" x 10' Colonial

#### **NET SIZES:**

4'' = 3-1/4''

5" = 4-1/4"

6" = 5-1/4"

#### LOAD BEARING CAPACITY

4'' = 3,000 lbs.

5'' = 6,000 lbs.

6'' = 7,500 lbs.


#### INSTALLATION—After

Cutting the post to desired length, apply a waterproof sealer and prime coat on all exposed areas. Aspexially on the ends.



#### COLUMNS


# COLUMNS

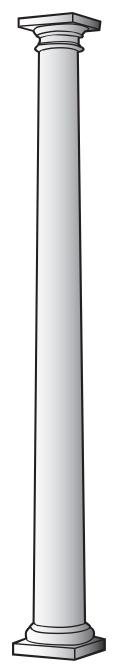

**STOCK ITEM** 

Smooth Round Fiberglass Columns


i ib ci giass	Coldiiii
8" x 6'	
8" x 8'	
8" x 10'	
10" x 8'	
10" x 10'	
10" x 12'	
12" x 8'	
12" x 10'	
12" x 12'	

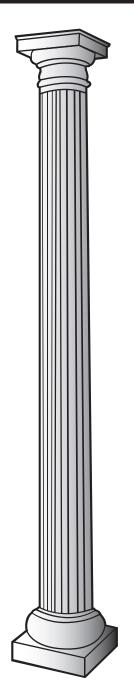

**SPECIAL ORDER** 

Fluted Round Fiberglass Columns

8" x 8' 8" x 10'
8" x 12'
10" x 8'
10" x 10'
10" x 12'
12" x 8'
12" x 10'
12" x 12'

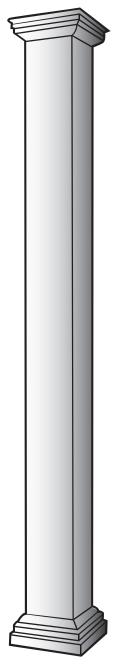

**STOCK ITEM** 

Dura Glass—Non-Tapered Square Poly—Classic Columns

8" x 12' 10" x 12'



Permalite—Non-Tapered **Round Columns** 

8" x 10' 10" x 10' GRADE Wood mouldings are available in two grades. "N Grade" is intended for natural or clear finishes and the exposed face must be of one single piece. "P Grade" is intended for opaque paint finishes or overlays and can be finger jointed and or edge glued.

These grades may have a few minor characteristics such as light checks, small pitch pockets, light torn grain, occasional medium stain or a small amount of medium pitch. A serious combination of these is not admissible in any one piece. The number and extent of characteristics permitted varies as the area of the piece increases or diminishes.

N-GRADE (suitable for natural, stain, paint, or enamel finish). On the basis of net 2" face—12' long this grade will admit the following characteristics or their equivalent:

A. A small spot of torn grain, one foot of medium pitch, light skip in dressing on back, or B. One small and one very small pitch pocket, or C. One short, tight season check and a light snipe at one end, or D. Medium stain in occasional (10%) pieces for one third the area in an otherwise perfect piece.

Characteristics that will not show when piece is laid shall not be given the same consideration as characteristics elsewhere.

P-GRADE (paint or overlay grade) The same quality as N-Grade except stain is no defect. Glue joints (laminated or finger joints) must be precision machined and assembled with tight joints. Patching, filling or plugging is permitted providing a paintable surface results.

LENGTHS Random lengths shall be 3 to 20 feet in multiples of one foot. Not over 15% of any one item shall be under 8 feet. When computing the percentage of shorts in casing and stops, pieces 7' in length will be considered long lengths.

Specified lengths of cut to length window and door trim shall be graded as completely usable.

Finger and/or laminated jointed mouldings may be ordered in specified lengths with not over 15% trim backs permitted in any one item.

Specified Lengths We reserve the option to charge a 25% premium on specified lengths of items normally sold on a random length basis. This policy applies mostly to Solid Pine, Oak and Hemlock mouldings.

ADHESIVES Adhesives used in finger joints or laminations shall meet the dry used adhesive performance requirements of ASTM D-3110-82 (or latest revision) "Standard Specification for Adhesives Used in Non-Structural Glued Lumber Products."

In situations where a Wet-Use adhesive is required, it shall be so specified, acknowledged and invoiced.

BUNDLING shall be in accordance with the Standard Wood Moulding and Millwork Producers Association Schedule.

MANUFACTURING TOLERANCES Thickness and width + or - 1/32"

DEFINITIONS Definitions of characteristics permitted in wood mouldings shall be those of the National Grading Rules for softwood lumber.

Settlement Provisions In determining compliance with purchase specifications and of effecting settlement of invoices between buyers and sellers, each item of a shipment shall be considered as of the grade invoiced if upon re-inspection 95% thereof or more is found to be of said grade or better.

#### Green's the Thing

At Trimco Millwork, we're not just trying to conserve energy and reduce our own carbon footprint, we're taking green to the next level by offering the finest, environmentally responsible building materials available. We offer a wide range of products that are made from recycled materials or are recycleable, as well as products from manufacturers that support the green initiatives of the organizations you see on this page. We are constantly searching for and adding high quality, green products to our inventory.

#### Go Green

To make it easier for our customers to find greener building materials we have developed GO GREEN, a selection of products that are easier on the earth through their manufacture, performance or use. Our GO GREEN offerings can help you meet your green product requirements.

#### **Building Green With Trimco**

The products listed below are a sample of the Go Green products we offer at Trimco Millwork:

#### **MOULDING**

Pac-Fit / Can Trim - MDF

Fred Tebb & Sons - Knotty Alder

Ferche - Oak

Sierra Pacific - Frames

Brightwood - Hemlock, Solid Pine,

& Finger Joint

#### **DOORS**

Therma Tru - Doors

Lynden Doors - Interior Doors

ODL - Door Lites

**WOODGRAIN DOOR** 

SIMPSON DOOR

SIMPSON STRONG TIE

**KROSSWOOD** 



#### For more information about GO GREEN products contact us at



1835 Commerce Ave. Boise, ID 83705

Phone: 208-336-9000 • Fax: 208-384-1658

Toll Free: 1-800-733-0312

A Division of Hoff Companies, Inc.

#### OTHER PRODUCTS FROM TRIMCO































































