



TRIMCO Millwork 1835 Commerce Ave. Boise, ID 83705

Phone: 208-336-9000 • Fax: 208-384-1658 Toll Free: 1-800-733-0312 • www.trimcomillwork.com

A Division of Hoff Companies, Inc.

TABLE OF CONTENTS

BASE MOULDING	2–4
CASING MOULDING	5–6
CROWN MOULDING	7–8
HEADER, CHAIR RAIL, DOOR STOP AND PANEL MOULDING	9–10
S4S MOULDING	11–12
MISCELLANEOUS MOULDING	13–16
MOULDING ACCESSORIES	17–28
JAMBS AND FRAMES	29
CUSTOM BUILD-UPS	31–36
DOORS	37–38
PORCH POSTS	39
COLUMNS	40

Our Mission...

To be the first choice supplier for our customer's millwork and finish products needs. Our skilled employees, each with a desire to excel, will provide quality products at competitive prices and deliver superior service to build lasting relationships with customers and vendors.



BASE MOULDING PROFILES

BASE MOULD

BASE MOULDINGS: APPLIED WHERE FLOOR AND WALLS MEET, FORMING A VISUAL FOUNDATION. PROTECTS WALLS FROM KICKS, BUMPS, FURNITURE, ETC. BASE MAY BE REFERRED TO AS ONE, TWO, OR THREE-MEMBER. BASE SHOE AND BASE CAP ARE USED TO CONCEAL UNEVEN FLOOR AND WALL JUNCTIONS.



TM 726 9/16 x 2-1/4 FJ 16' H RL



TM 735 9/16 x 2-1/4 **FJ** 16'



TM 622 7/16 x 2-1/2 MDF 16'



TM 725 9/16 x 2-1/2 FJ 16' SP RL



TM 1213 1/2 x 3-1/8 KA RL



TM 411 9/16 x 3-1/4 FJ 16' MDF 16'




TM 433 9/16 x 3-1/4 FJ 16' H RL MDF 16'



TM 444 $11/16 \times 3-1/4$ FJ 16' H RL SP RL OV 16' KA RL

5/8 x 3-1/4 MDF 16'

7/16 x 3-1/4 M RL





TM 445 11/16 x 3-1/4 FJ 16'



TM 623 9/16 x 3-1/4 FJ 16' H RL KA RL MDF 16' 1/2 x 3-1/4 O RL



TM 683 5/8 x 3-1/4 **FJ** 16'



TM 713 9/16 x 3-1/4 FJ 16' H RL SP RL O RL



TM 730 9/16 x 3-1/4 FJ 16' H RL MDF 16'



TM 753 9/16 x 3-1/4 **FJ** 16'




TM 832 5/8 x 3-1/4 FJ 16'



TM 852 9/16 x 3-1/4 FJ 16'


BASE MOULDING PROFILES

BASE MOULD

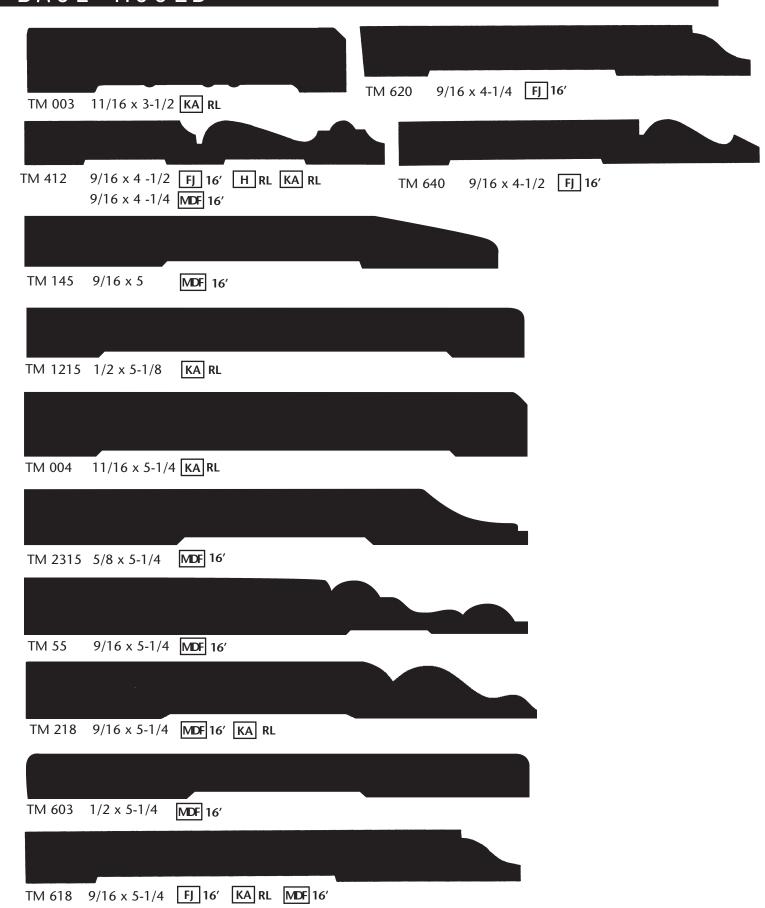

BASE MOULDING PROFILES

BASE MOULD

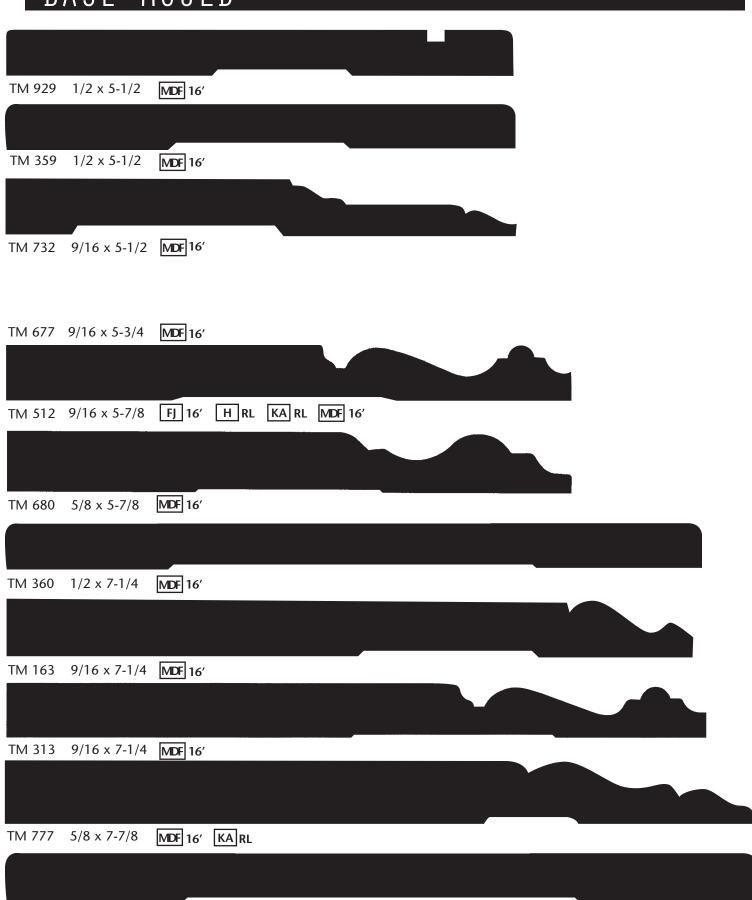


TM 366 1/2 x 11-1/4 MDF 16'

Note: Actual Profile Sizes May Vary Depending On Wood Species


[•] FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Prine • KP = Knotty Prine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Cherry • PRIM = Primed • MDF=Medium Density Floetboard • MDF=UL=MDF Ultralite • KA = Knotty Alder • CA = Clear Alder • SA = Superior Alder • M = Maple • VCH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber

CASING MOULDING PROFILES

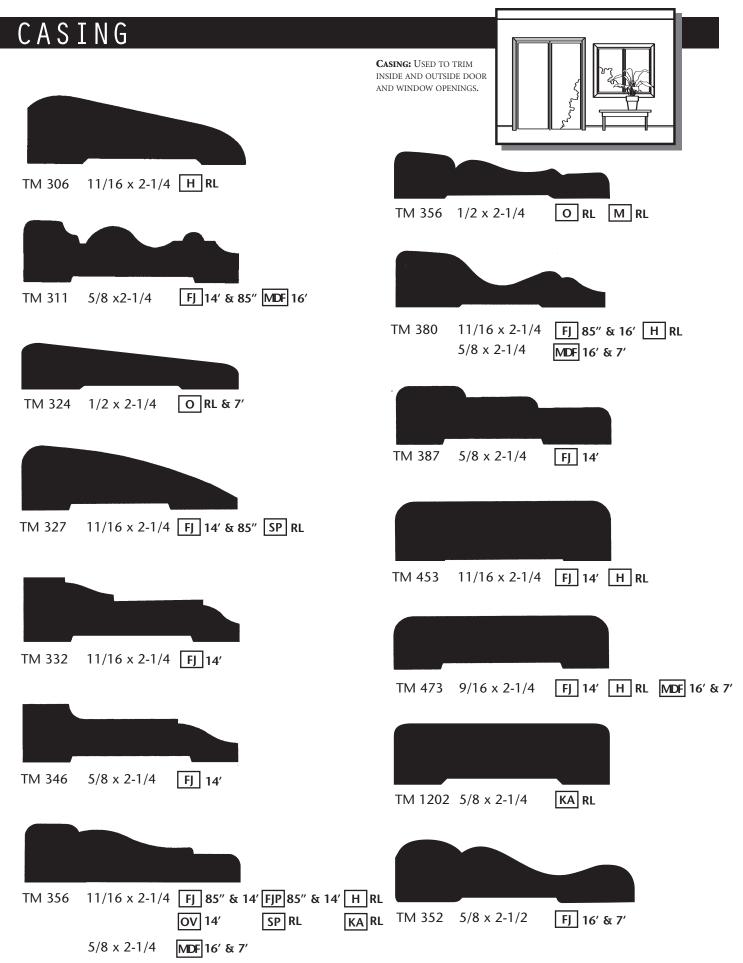


CASING MOULDING PROFILES


CASING

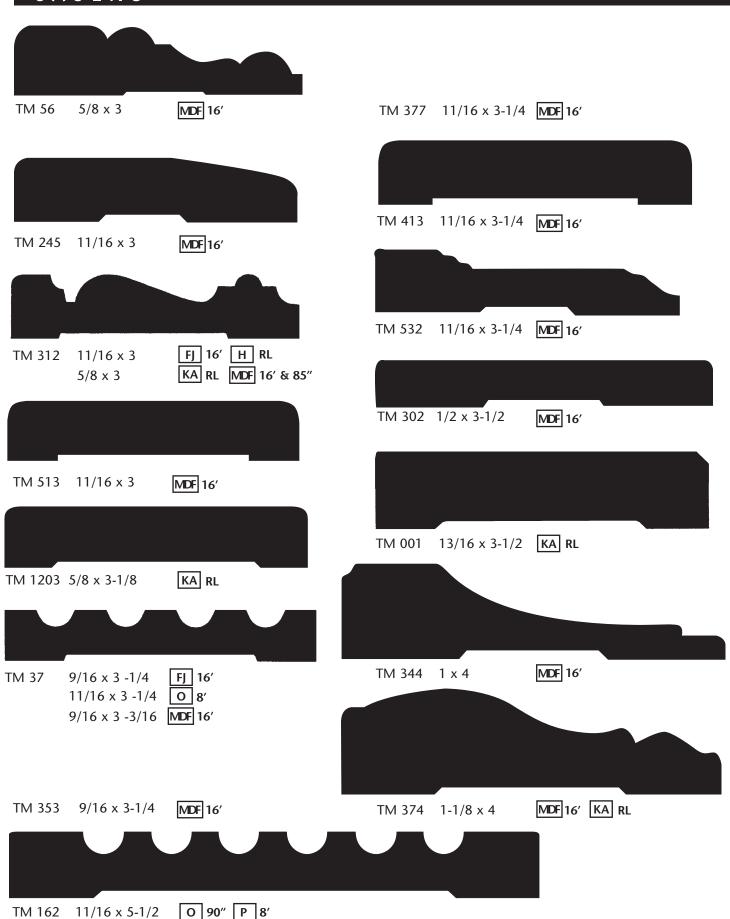

Note: Actual Profile Sizes May Vary Depending On Wood Species

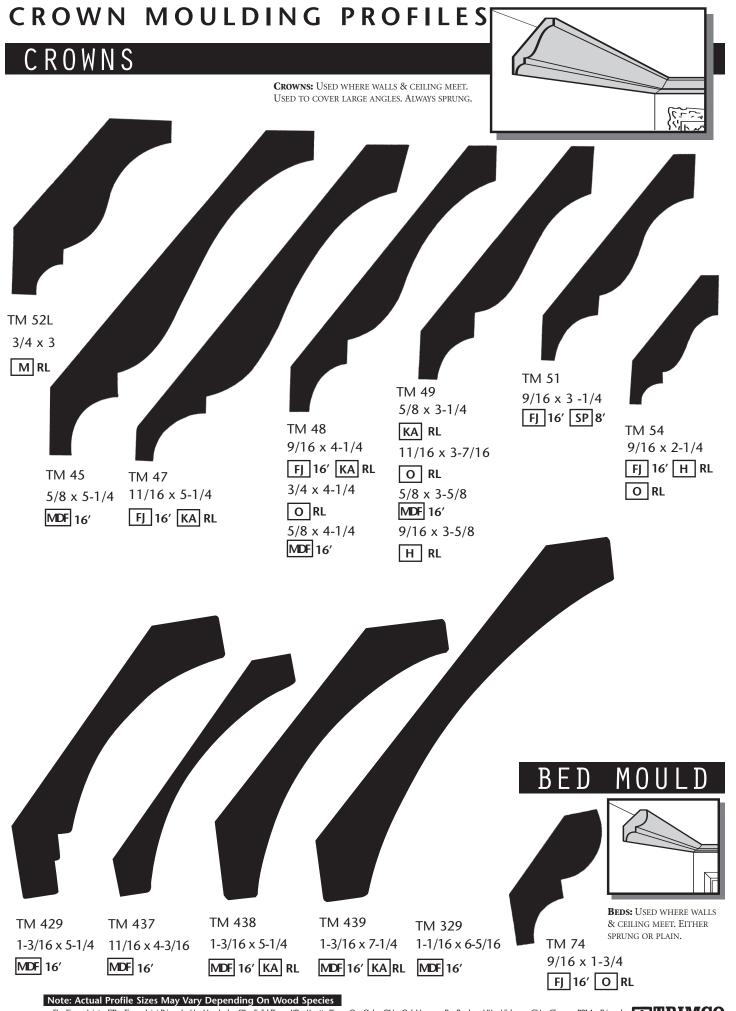


CROWN MOULDING PROFILES

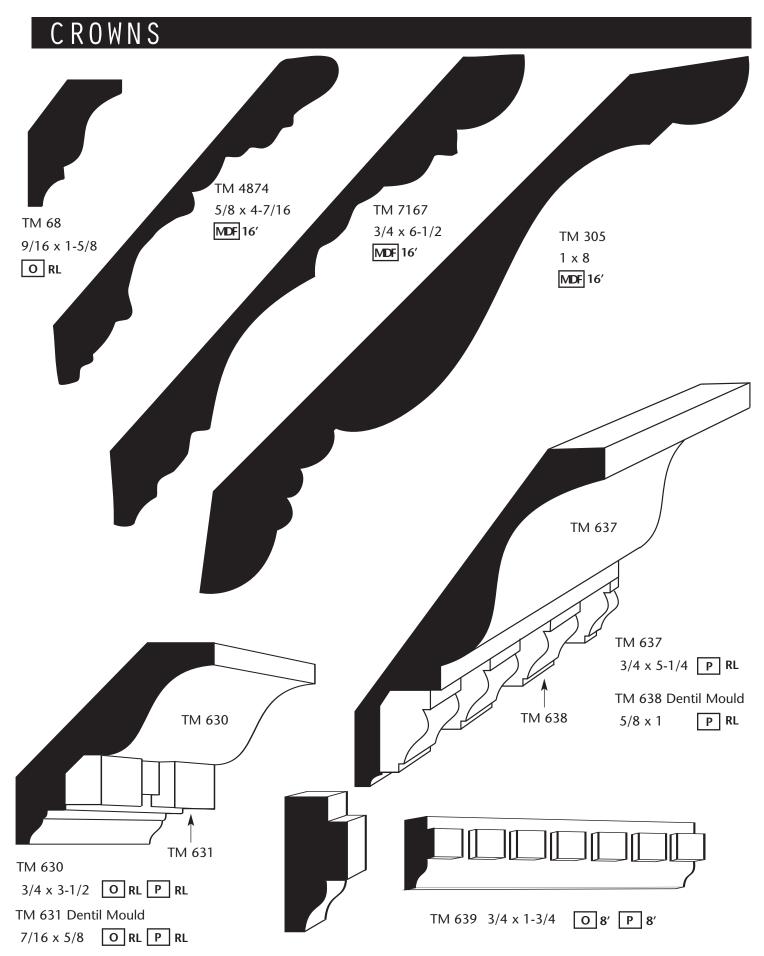

Note: Actual Profile Sizes May Vary Depending On Wood Species

• FJ = Finger Joint • FJP = Finger Joint Primed • H = Hemlock • SP = Solid Pine • KP = Knotty Pine • O = Oak • OV = Oak Veneer • P = Poplar • HK = Hickory • CH = Chemy • PRM = Primed • MDF=Medium Density Fiberboard • MDF-UL = MDF-Ultralite • KA = Knotty Alder • CA = Gear Alder • SA = Superior Alder • M = Maple • VGH = Vertical Grain Hemlock • LVL = Laminated Veneer Lumber

HEADER MOULDING PROFILES

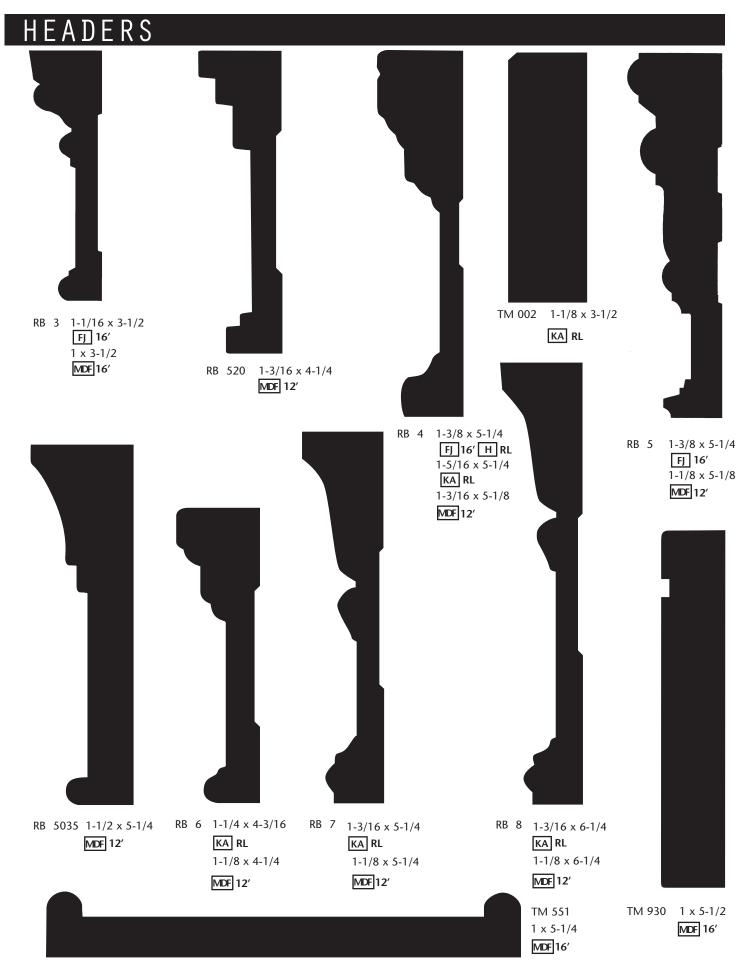

Note: Actual Profile Sizes May Vary Depending On Wood Species

CHAIR RAIL PROFILES



TM 391 9/16 x 1-3/4 **FJ** 16'




TM 719 3/4 x 2-1/2 O RL



TM 390 11/16 x 2-5/8 **FJ** 16' **H RL** 5/8 x 2-5/8 MDF 16'

CHAIR RAIL: INTERIOR MOULDING APPLIED ABOUT ONE THIRD UP FROM THE FLOOR, PARALLELING BASE MOULDING AND ENCIRCLING THE ROOM. ORIGINALLY USED TO PREVENT CHAIRS FROM MARRING WALLS. USED TODAY AS A KEY DECORATIVE DETAIL IN TRADITIONAL AND COLONIAL DESIGN.





TM 297 11/16 x 3 FJ 16'



FJ 16' KA RL MDF 14' TM 304 5/8 x 3

DOOR STOP PROFILES

DOOR STOPS: IN DOOR TRIM, STOP IS NAILED TO THE FACES OF THE DOOR FRAME TO PREVENT THE DOOR FROM SWINGING THROUGH. AS WINDOW TRIM, STOP HOLDS THE BOTTOM SASH OF A DOUBLE-HUNG WINDOW IN PLACE. ALSO USED AS AN APRON UNDER WINDOW STOOLS.















3/8 x 1-1/4 **O** 7'

KA RL

PANEL MOULDING PROFILES

PANEL MOULD








TM 182 11/16 x 1-5/8 FJ 16'



FJ 16' O RL M RL KA RL



Note: Actual Profile Sizes May Vary Depending On Wood Species

S4S STOCK MOULDING PROFILES

STOCK SCREEN/S4S STOCK: SAME BASIC USES AS SQUARES. TM 239 TM 254 TM 249 11/16 x 11/16 1/2 x 3/4 11/16 x 1-5/8 FJ 16' FJ 16' SP RL 11/16 x 1-3/4 H 16' 3/4 X 1-1/2 0 16' S4S 1x2 S4S 1x3 S4S 1x3 S4S 1x4 S4S 1x5 S4S 1x6 11/16 x 3-1/2 11/16 x 4-9/16 11/16 x 5-1/4 3/4 X 1-1/2 11/16 x 2-1/2 11/16 x 2-3/4 FJ 16' H RL VGH RL FJ 16' H RL FJ 16' MDF 17' MDFUL 16' FJ 16' 3/4 X 4-11/16 3/4 x 3-1/2 3/4 x 5-1/2 11/16 X 1-1/2 KA RL SA RL O RL MDF 17' MDF 16' KA RL SA RL 11/16 x 4-11/16 MDF 17' 3/4 X 1-5/8 MDF 17' O RL MDFUL 16' KA RL 11/16 X 3-1/2 11/16 x 5-1/2 MDFUL 16' MDFUL 16' H RL VGH RL

3/4 x 3-1/2


P RL

3/4 x 5-1/2

P RL

S4S STOCK MOULDING PROFILES

S4S STOCK

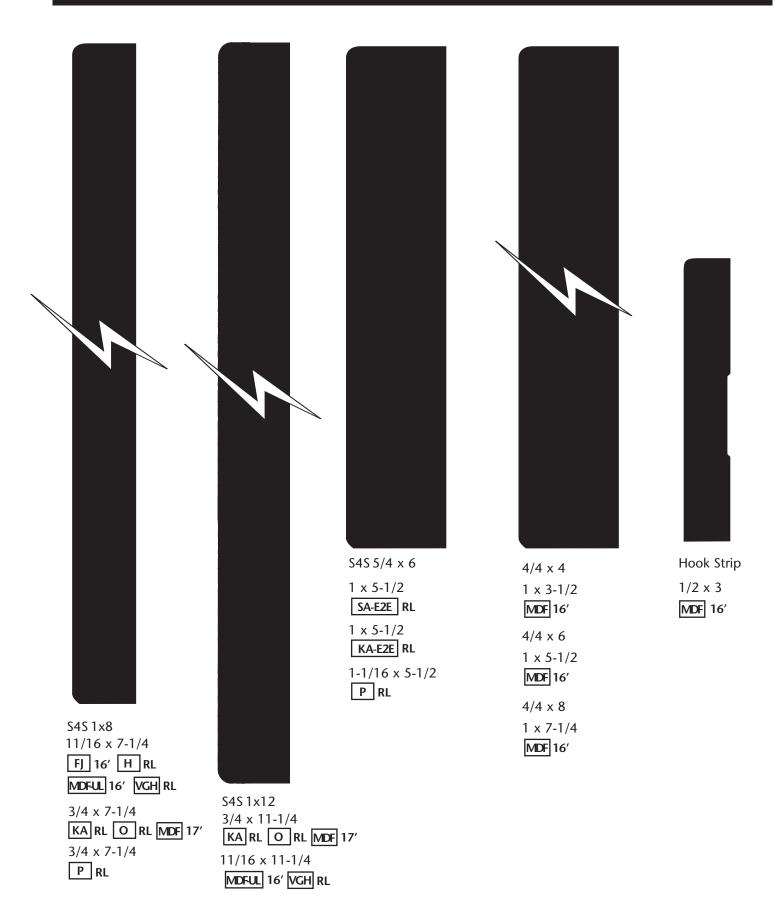



CHAMFER STRIP



TM 995 11/16 x 11/16 SP RL

CHAMFER STRIP: USED IN HIGHWAY AND DAM CONSTRUCTION FORMS, MAKING A CHAMFERED EDGE AT CONCRETE CORNERS. ALSO USED WHERE KITCHEN CABINET TOPS MEET THE WALL. ALSO USED AS A LINOLEUM COVE (UNDER LINOLEUM WHERE IT EXTENDS UP THE WALL.)






BRICK MOULD



TM 180 1-1/4 x 2 FJ 7' KA RL

FJP 18' & 7'


1-3/16 x 2 H RL




BRICK MOULD: USED AS AN EXTERIOR DOOR AND WINDOW CASING. A THICK MOULDING PROVIDES A SURFACE FOR BRICK OR OTHER SIDING TO BUTT AGAINST.

BAND

RABBETED MOULDING. USED TO SURROUND THE OUTSIDE EDGE OF CASING.



TM 281 11/16 x 1-1/8



PICTURE

USED TO SUPPORT HOOKS FOR PICTURE HANGING



TM 273 11/16 x 1-3/4 H RL



BASE CAPS



TM 164 11/16 x 1-1/8 H RL



TM 167 11/16 x 1-1/8




TM 163 11/16 x 1-3/8

O RL



A DECORATIVE PIECE INSTALLED FLUSH AGAINST WALL AND AT THE TOP OF AN S4S BASEBOARD. ALSO USED AS PANEL MOULDING.

Note: Actual Profile Sizes May Vary Depending On Wood Species

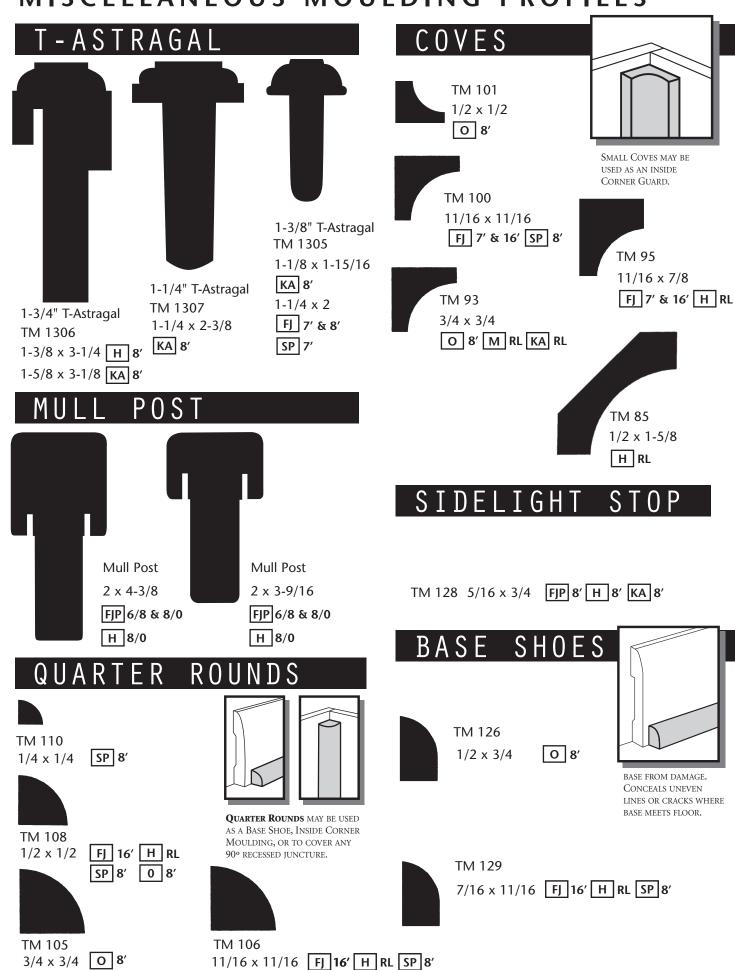

_F EDGE/SCREEN MOULD



TM 142 5/16 x 3/4 FJ 16'


1/4 x 3/4 SP RL O 8'

H RL




TM 144 1/4 x 3/4 H RL

SCREEN MOULD: COVERS SEAM WHERE SCREENING IS FASTENED TO THE SCREEN FRAME.



SHELF EDGE: ALSO COVERS PARTICLE OR FLAKEBOARD SHELF EDGES.



HAND RAIL




TM 231 1-1/2 x 1-11/16 H 16' PRM 16' & 18' TM 240 1-1/4 x 2-1/4 H RL

HAND RAIL: USED AS A HAND SUPPORT IN A STAIRWELL.




CORNER GUARDS



TM 206 11/16 x 11/16 FJ 16' 3/4 X 3/4 O 8'

CORNER GUARDS: OUTSIDE (OS) CORNER GUARD IS USED TO PROTECT CORNERS OR TO COVER RAGGED EDGE WHERE WALL COVERING AND PAINTED SURFACES MEET AT OUTSIDE CORNER.



USED AS A SCREEN MOULDING, BEAD SHELF EDGE OR PANEL MOULDING.



TM 120

 $1/2 \times 1$

SP RL

ROUND




ROUNDS: MOST OFTEN USED AS A CLOSET POLE OR ROOM DIVIDER.

TM 233

1-1/4

H RL LVL 12' & 16'




CORNER MOULD

Universal Corner Mould used for radius corners.



COUNTER EDGE

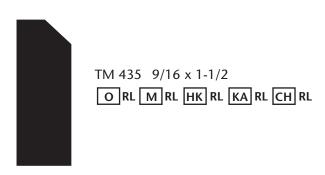

TM 265 9/32 x 1-3/4 LATTICE: ORIGINALLY USED IN TRELLIS FJ 16' WORK. THIS SMALL, PLAIN S4S MOULDING 9/32 x 1-5/8 TM 267 TM 268 IS AMONG THE MOST VERSATILE OF PROFILES. H RL 9/32 x 1-3/8 9/32 x 1-1/8 1/4 x 1-3/4 0 8' FJ 16' H RL FJ 16' H RL SP RL

SHELVING & SHEET GOODS

SUPER SHELF	
DESCRIPTION	SIZE
#45 Super Shelf — 3/4"	12″ X 97″
#45 Super Shelf — 3/4"	12" X 145"
#45 Super Shelf — 3/4"	16" X 97"
#45 Super Shelf — 3/4"	16" X 145"
#45 Super Shelf — 3/4"	24" X 145"

COUNTERTOP	
DESCRIPTION	SIZE
#45 Countertop — 3/4"	25" X 145"


MDF SHEET STOCK		
THICK	SIZE	
1/4"	49" x 97"	
1/2"	49" x 97"	
3/4"	49" x 97"	
3/4"	49" x 121"	
1-1/8"	49" x 97"	

BEAD BOARD

Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	1-1/2"
3/16" x 4' x 8'	Primed	2"

Size	Description	Bead Spacing
3/16" x 4' x 8'	Raw	3"

V - G R O O V E

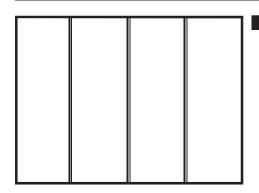

Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	4"

Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	6"

Size	Desc.	Spacing
3/16" x 4' x 8'	Raw	8"


WAINSCOT




PANEL CAP



TM 292
9/16 x 1-1/8 FJ 16' H RL SP 8' KA RL
3/4 X 1-1/4 O 8'



PANEL/PLY CAP: TURNS OUT THE UPPER EDGE OR TOP OF A WAINSCOT. COVERS PLYWOOD'S ROUGH SANDWICH EDGE IN INSTALLATIONS WHERE IT IS EXPOSED TO VIEW. ALSO CALLED A DADO CAP.

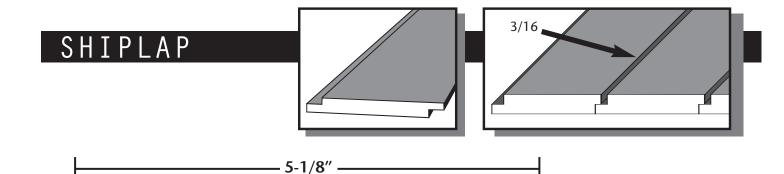

SL 1X6 5/8 x 5-1/2



- 6-7/8" -----


SL 1X8 5/8 x 7-1/4

MDF 16'


Note: Actual Profile Sizes May Vary Depending On Wood Species

FYPON ACCESSORIES

STONE & TIMBER COLLECTION

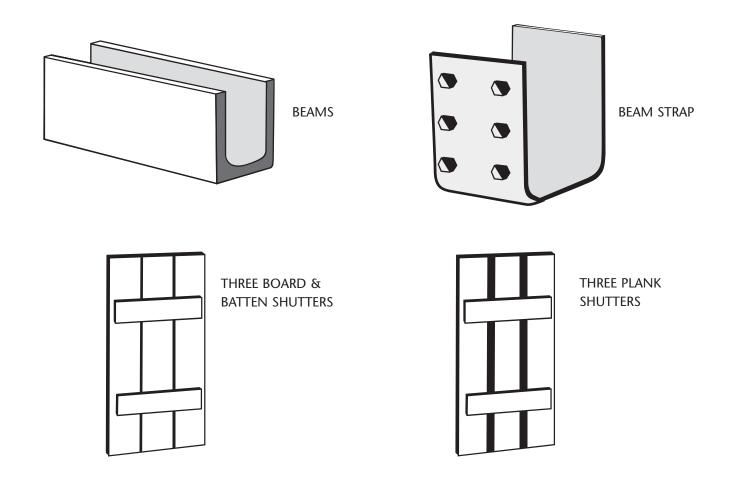

COLONIAL COLLECTION

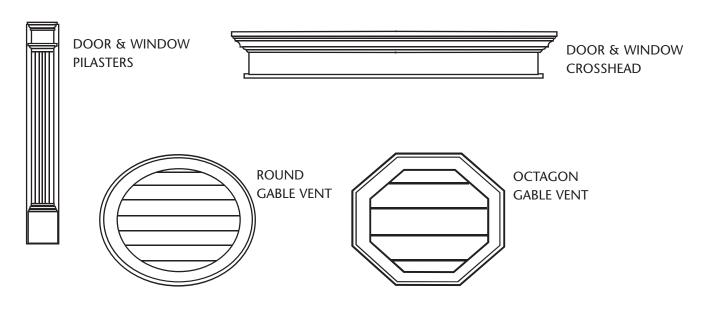




FLEXIBLE MOULDING

$3/4 \times 5 - 1/2$ $3/4 \times 3 - 1/2$ 9× × 4

TRUE RADIUS MATERIAL LENGTH CHART

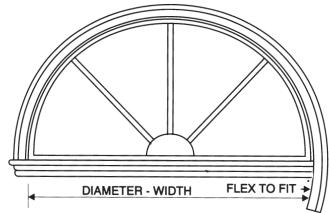

RADIUS LENGTH CONVERSION TABLE

OUR STANDARD DIAMETER LENGTHS

2/4 DIAMETER = 5.166 LINEAL FOOT 3/0 DIAMETER = 6.333 LINEAL FOOT 4/0 DIAMETER = 7.916 LINEAL FOOT 5/0 DIAMETER = 9.500 LINEAL FOOT 6/0 DIAMETER = 11.00 LINEAL FOOT

OUR CUSTOM DIAMETER LENGTHS


1/6 DIAMETER = 4.000 LINEAL FOOT 2/0 DIAMETER = 4.750 LINEAL FOOT 2/6 DIAMETER = 5.583 LINEAL FOOT 2/8 DIAMETER = 6.000 LINEAL FOOT 3/4 DIAMETER = 6.833 LINEAL FOOT 3/6 DIAMETER = 7.333 LINEAL FOOT 4/4 DIAMETER = 8.333 LINEAL FOOT 4/6 DIAMETER = 8.833 LINEAL FOOT

FLEXIBILLITY NOTES

A 2/4 diameter will expand to 2/6 or contract to 2/0 A 3/0 diameter will expand to 3/6 or contract to 2/6 A 4/0 diameter will expand to 4/6 or contract to 3/6 A 5/0 diameter will expand to 5/6 or contract to 4/6 A 6/0 diameter will expand to 6/6 or contract to 5/0

Flexible expansion and contraction may vary when molding width is over 3 1/2 inches.


PLINTH BLOCKS BULLSEYE DESIGN

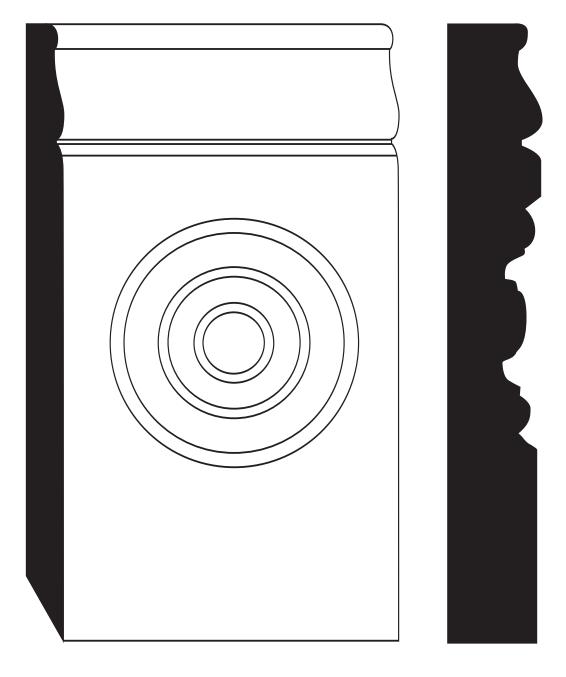

1 x 3-1/2 x 6-1/2

MDF


PLINTH BLOCKS

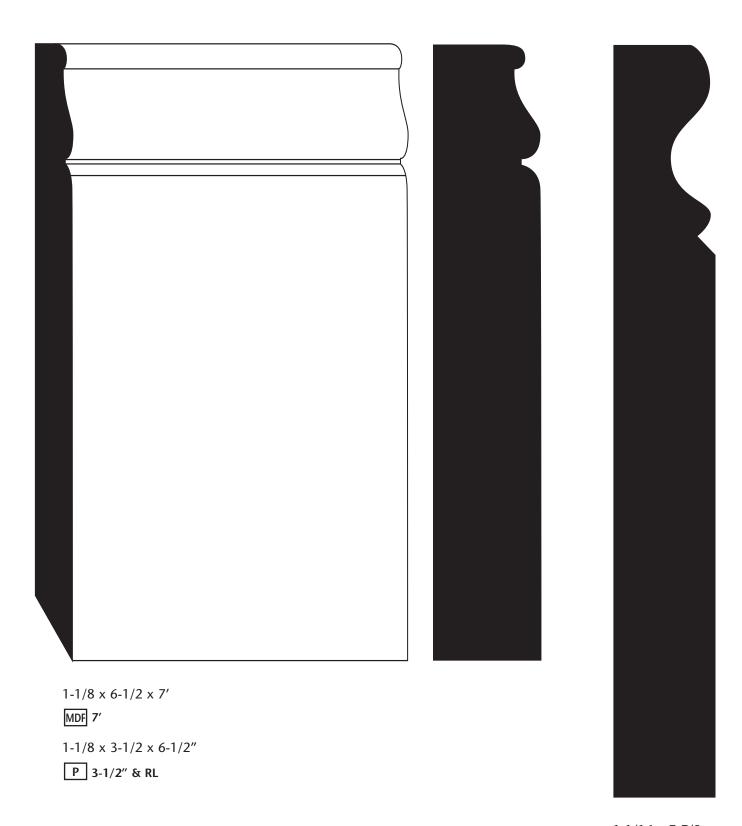


1-1/16 x 7-7/8

KA RL

CORNER BLOCKS BULLSEYE DESIGN

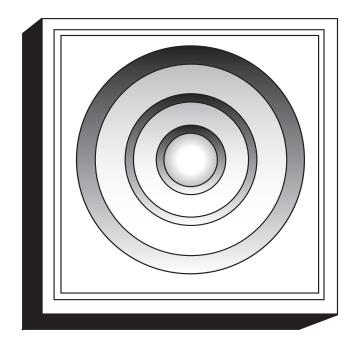

1 x 3-1/2 MDF ОМ 13/16 x 3-1/2

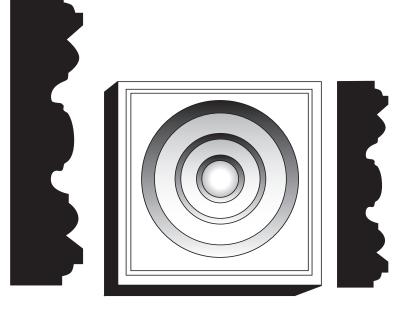


3/4 x 2-1/2 O M 1 x 2-1/2 MDF



7/8 x 3-1/2 SP

CORNER NSIDE

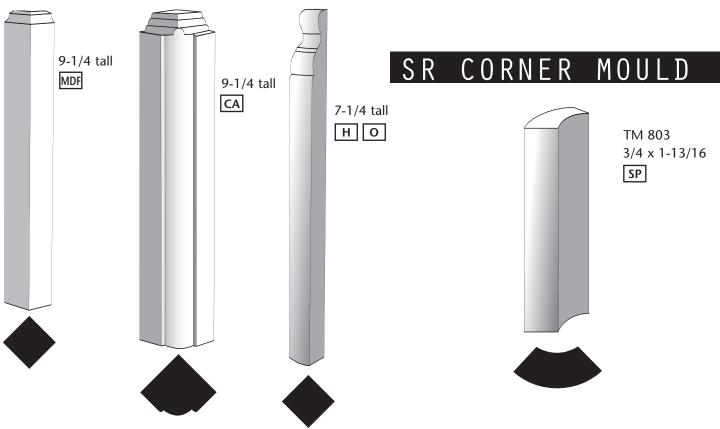


UNIVERSAL OUTSIDE CORNER 9-1/4 tall MDF 9-1/4 tall CA 7-1/4 tall НО


RADIUS CORNERS TM 356 5/8 x 2-1/4 MDF 11/16 x 2-1/4 H TM 411 **H** MDF TM 444 11/16 x 3-1/4" 9/16 x 3-1/4" 5/8 x 3-1/4" MDF TM 312 H 11/16 x 3" TM 730 **H** MDF TM 852 H TM 623 H MDF TM 412 9/16 x 4-1/2" Н 9/16 x 3-1/4" 9/16 x 3-1/4" 9/16 x 4-1/4" 9/16 x 3-1/4 MDF

Note: Actual Profile Sizes May Vary Depending On Wood Species

RADIUS CORNERS

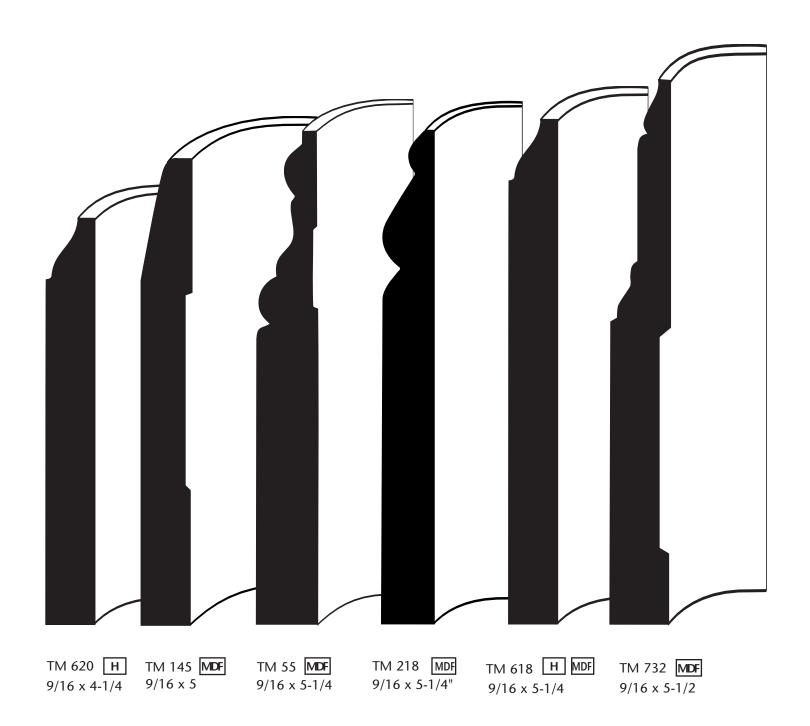

RADIUS CORNERS

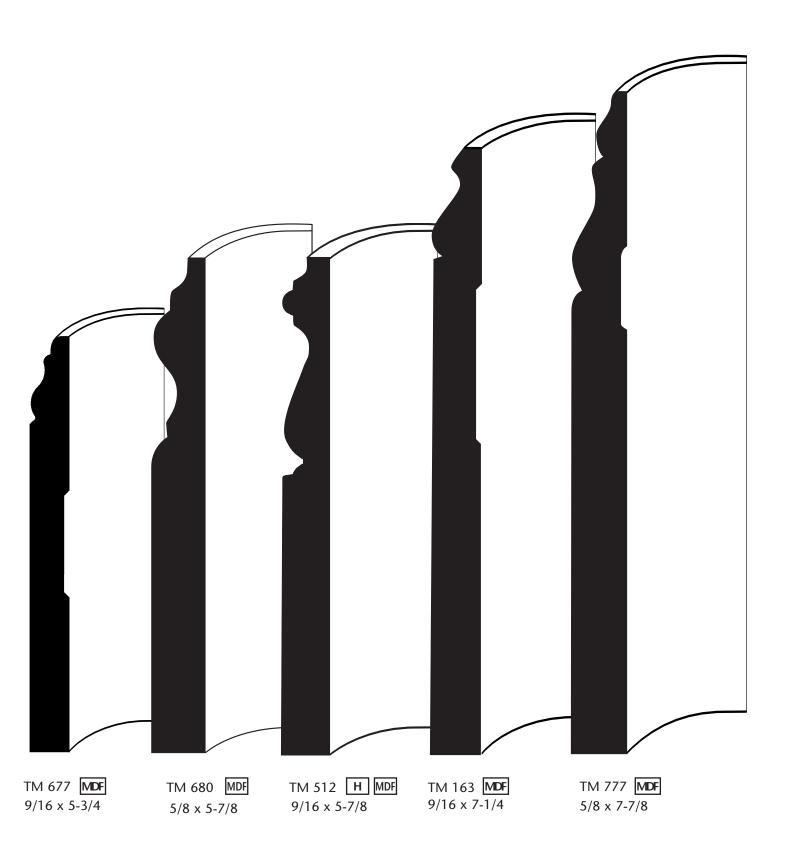

TRIM-FIT MDF CROWN CORNERS

PRE-MANUFACTURED CROWN CORNERS



Inside Corner

EASY INSTALLATION

Measure wall from corner to corner and subtract the appropriate crown dimension listed below from measurement:

CUTBACK FOR EACH

6	3




Trim-Fit #	Crown Width	Inside Corner	Outside Corner
TM49	3-5/8"	3"	5/8"
TM48	4-1/4"	3-1/4"	5/8"
TM45	5-1/4"	4"	5/8"
TM329	6-5/16"	5"	5/8"

Outside Corner

Keystone (Splice Cover)

TRIM-FIT $^{\text{TM}}$ Crowns are manufactured to fit the following TRIMCO profiles:

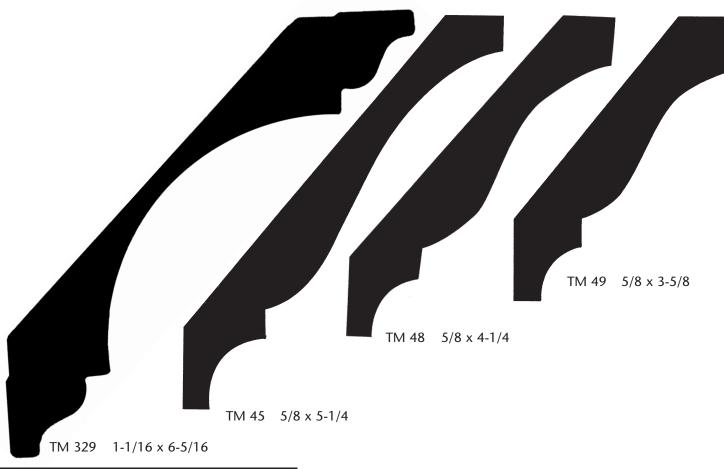

Note: Actual Profile Sizes May Vary Depending On Wood Species

INTERIOR JAMBS & EXTERIOR FRAMES

Interior Flat Jamb



Kerf Flat Jamb



3-1/2 FLAT JAMBS W/SHEETROCK KERF	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×		Х
4-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	X		Х
FJ PRIMED	×		
KNOTTY ALDER	×		Х
HEMLOCK SOLID	×		
HEMLOCK VENEER	Х		Х
SOLID PINE	×		
OAK VENEER-LUAN Substrate	Х		
MDF MEDITE PRIMED	×		
4-7/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×		Х
HEMLOCK SOLID	×	×	
OAK VENEER-LUAN Substrate	Х		
SOLID PINE			Х
KNOTTY ALDER	X		Х
5-1/4 FLAT JAMBS	82-1/4"	86-1/4"	
FJ RAW	×		
HEMLOCK SOLID	×		
6-5/8 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	×	X	Х
HEMLOCK SOLID	Х		Х
KNOTTY ALDER	Х		Х
PINE VENEER	Х		
7-1/4 FLAT JAMBS	82-1/4"	86-1/4"	98-1/4"
FJ RAW	Х		
HEMLOCK SOLID	Х	Х	
KNOTTY ALDER			Х

Exterior Blank



Exterior SCSK



1-1/4 X 4-5//8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK	01-5/0	X	04	0/-1/2	97-5/6	99
		X				
FJ RAW BLANK HEMLOCK SOLID SCSK		X		 		
		^		 		_
FJ PRIMED BLANK	Х			 	Х	_
KNOTTY ALDER SK			Х			
1-1/4 X 4-3/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х			/	
1-1/4 X 4-7/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW BLANK				Х	/	
1-1/4 X 5-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х		 		
FJ RAW SK				_		X
FJ RAW BLANK		X				X
HEMLOCK SOLID SCSK		X		 		
HEMLOCK SOLID SK				 		X
HEMLOCK SOLID BLANK		Х			/	
1-1/4 X 6-5/8 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		X		 	, , ,	Х
FJ PRIMED BLANK	Х	X		 	X	Х
HEMLOCK SOLID SCSK				 		_^
HEMLOCK SOLID BLANK KNOTTY ALDER SK		Х		_		\ \ \
1-1/4 X 7-1/4 EXTERIOR FRAMES			Х			Х
(2-14" Thick Doors)	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
KNOTTY ALDER SK						Х
1-1/4 X 7-1/4 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SCSK		Х				
FJ RAW SK						Х
FJ RAW BLANK		Х				_
HEMLOCK SOLID SCSK		Х				
HEMLOCK SOLID SK						Х
HEMLOCK SOLID BLANK						Х
KNOTTY ALDER SK						Х
1-1/4 X 8-1/2 EXTERIOR FRAMES	81-5/8"	82-1/2"	84"	87-1/2"	97-5/8"	99"
FJ RAW SK				Х		Х
HEMLOCK SOLID SK						Х
KNOTTY ALDER SK						Х


^{*} SCSK = Sill Cut/Saw Kerf

SK = Saw Kerf

FJP = Finger Joint Prime

KP = **Knotty Pine**



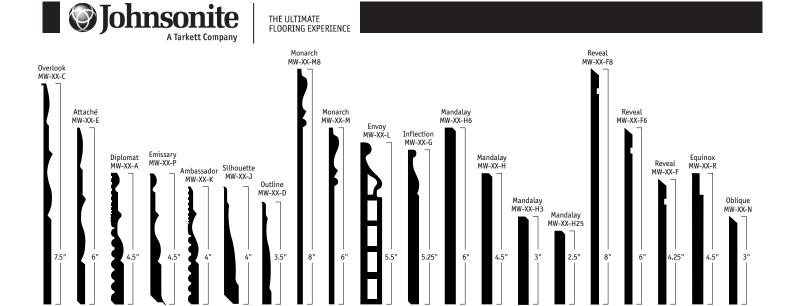

.375

STOCK STOCK STOCK

MILLWORK CHAIR RAIL

STOCK

.375"

.50"

.313"

STOCK

.25"

All Millwork profiles in wall base, chair rails and corner guard are available in standard 8' lengths.

.375'

STOCK

.375"


.375"

.25"

.25"


.25"

.375"

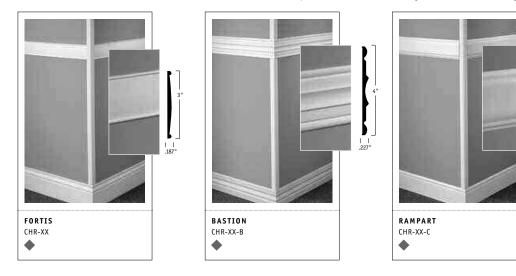


.19'

MILLWORK CORNER GUARD



 $\verb|MILLWORK| ACCESSORIES|$

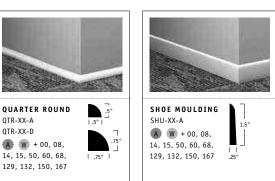


HIGH PERFORMANCE COMES IN MANY SIZES AND SHAPES.


People are happiest when all the dots are connected. That's why the Millwork Wall Finishing System includes more than 23 elements in all:


20 contoured wall base profiles, 3 chair rail profiles, a corner guard, self-stick quarter round and shoe moulding.


It's a system that can eliminate concerns of mismatched wood or variations in color. Johnsonite carefully coordinates profile designs and quarantees color consistency from one batch to another, from one year to the next.


MOUNTAIN HERITAGE

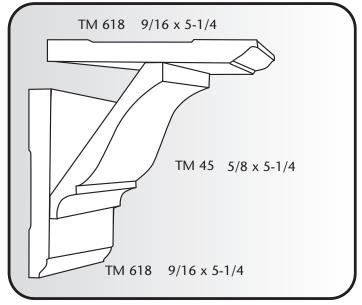


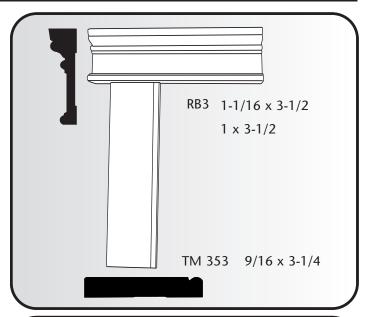

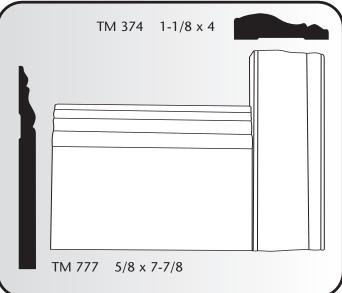


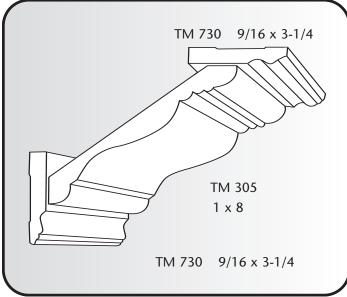


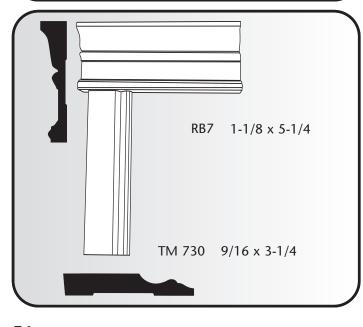


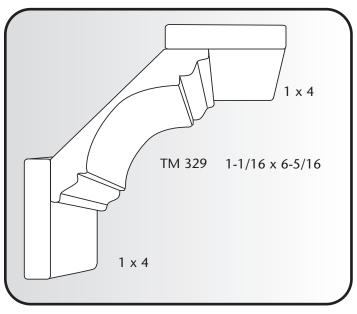


MODERN COLONIAL

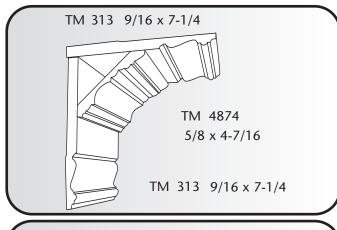


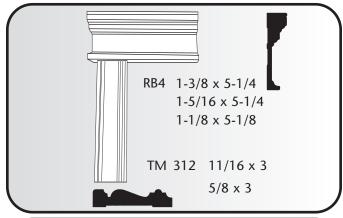


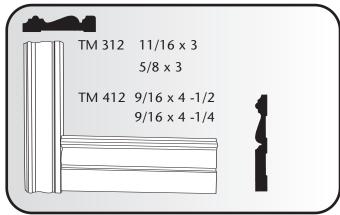


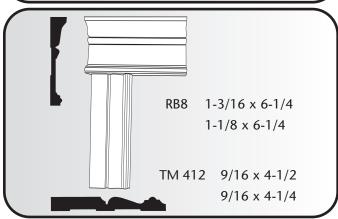


CRAFTSMAN

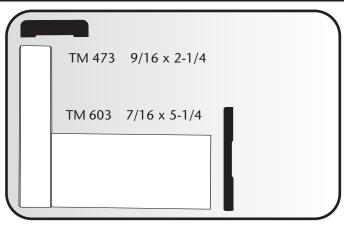


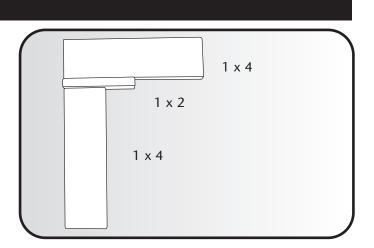


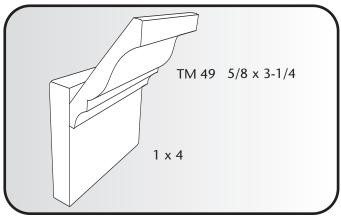



CLASSIC COLONIAL

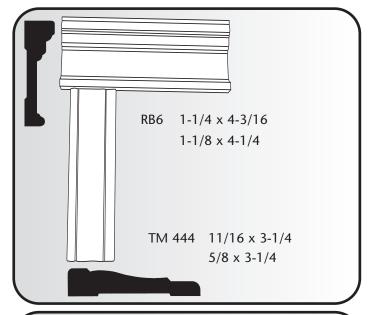


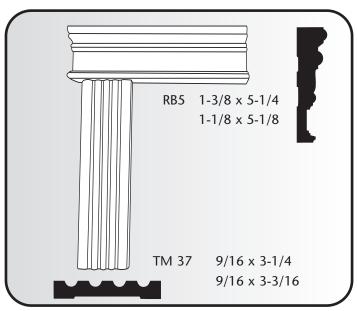

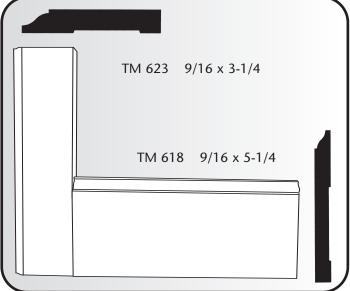


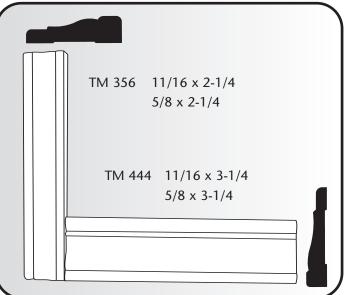


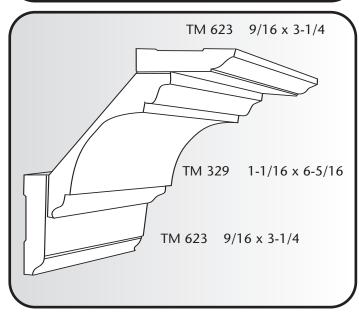


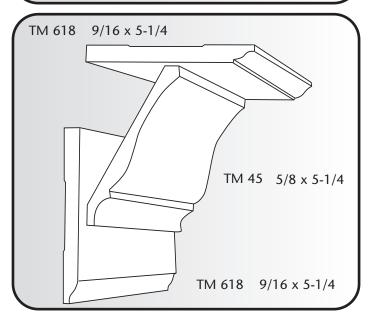



CONTEMPORARY

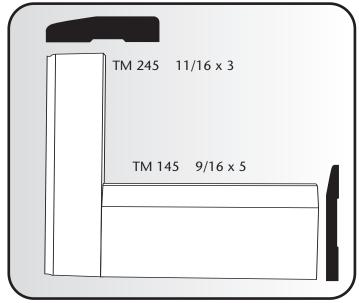


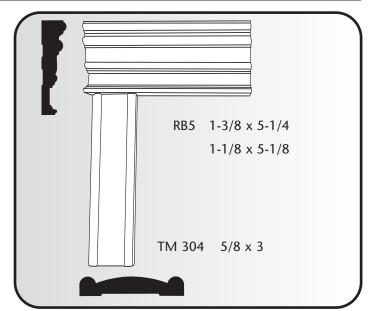

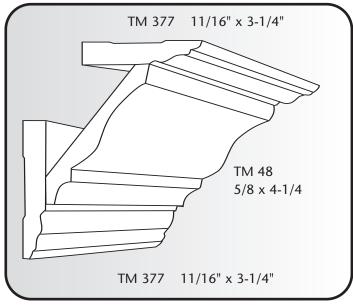


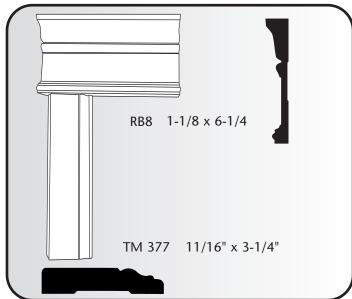


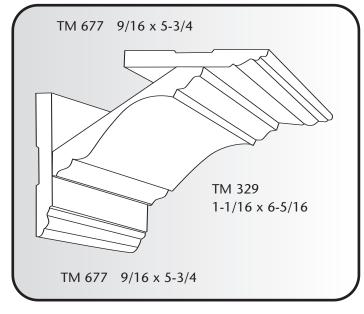

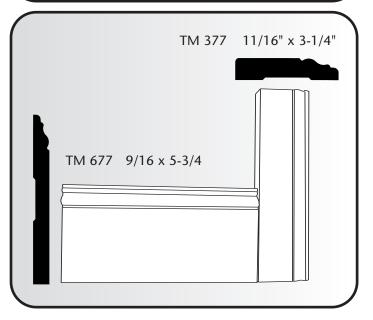


PRE-MANUFACTURED CROWN CORNER BUILD-UPS

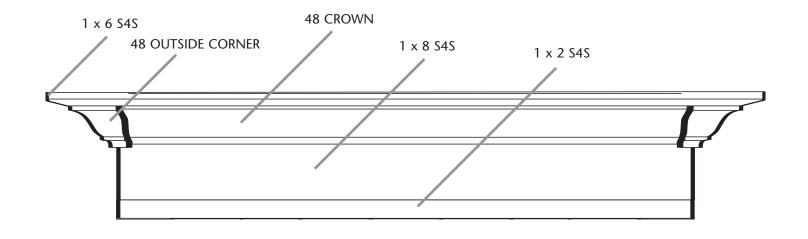


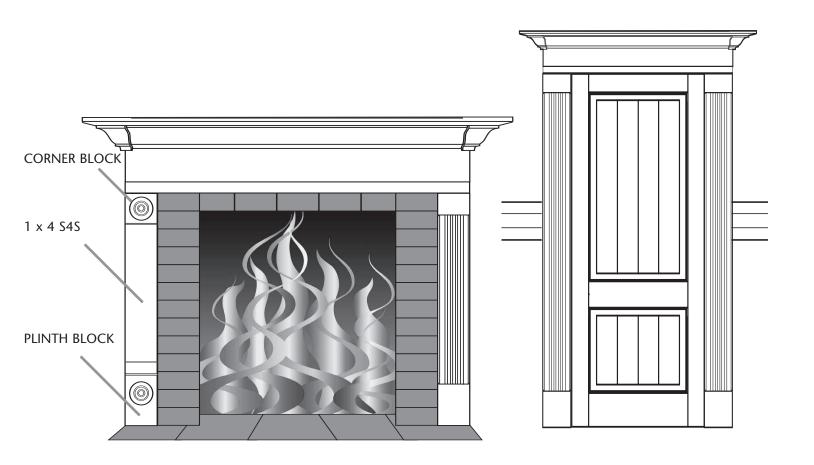



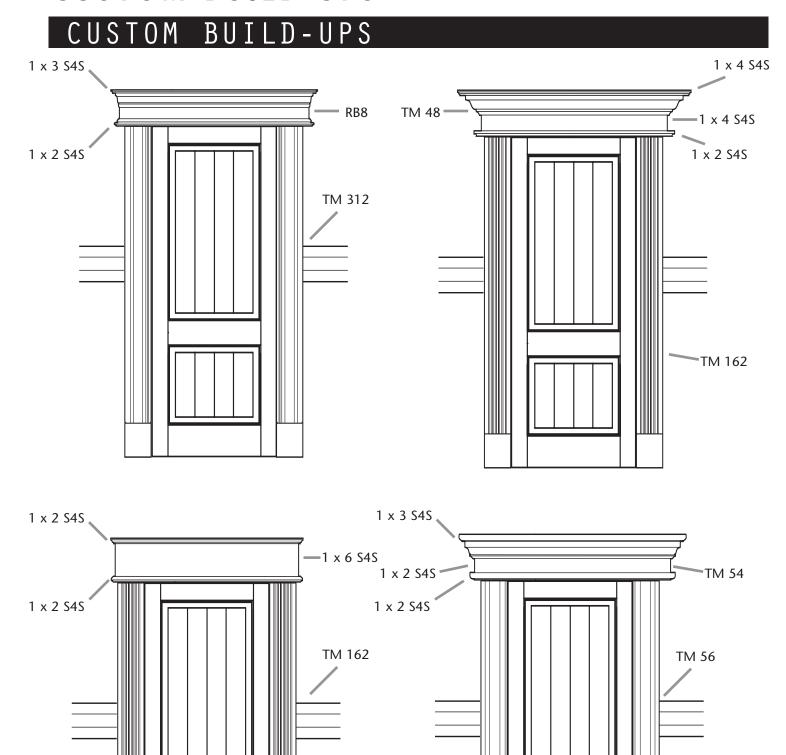

LYNDEN INTERIOR DOOR STILES

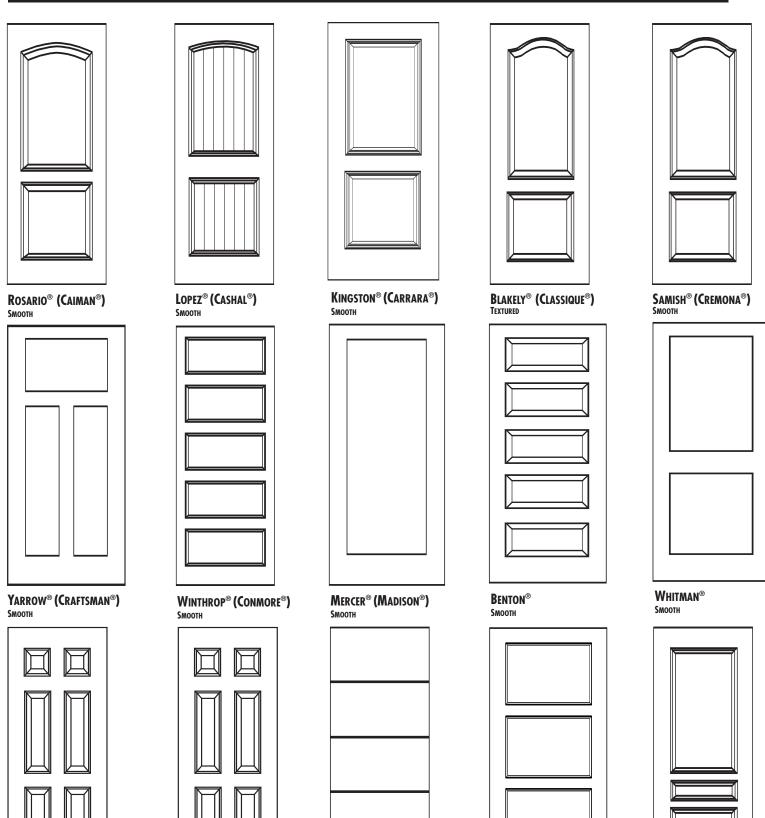

COLUMBIA® (COLONIST®)
SMOOTH

Lynden Door:

DENMAN®

Sмоотн

ABERDEEN®

Sмоотн


BONNEVILLE® (COLONIST®)


TRIMCO MILLWORK


TEXTURED

WESTPORT® (CLERMONT®)

WOOD DOORS

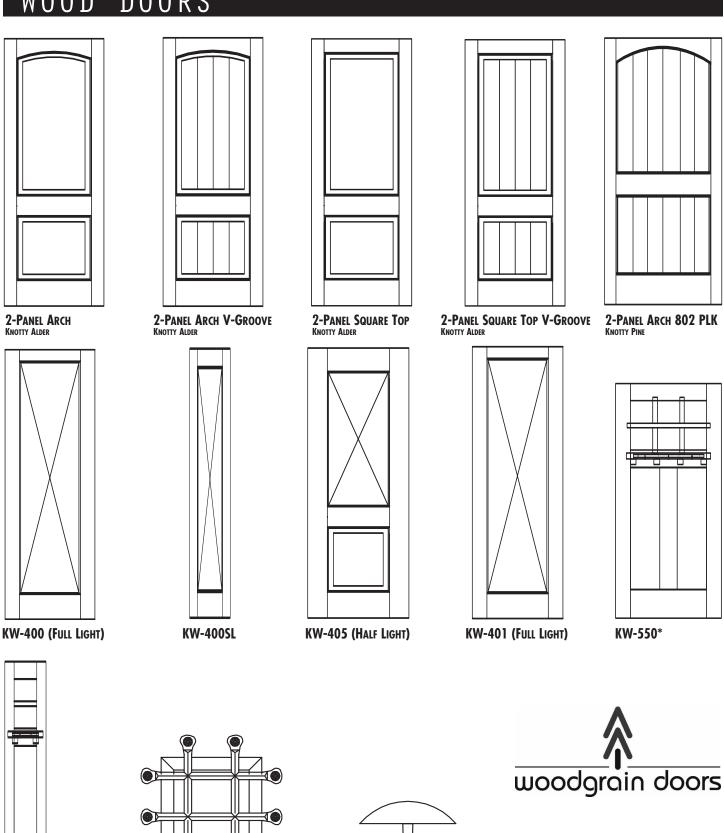








KW-552*

^{*} SHOWN WITH OPTIONAL DENTIL SHELF

PORCH POSTS

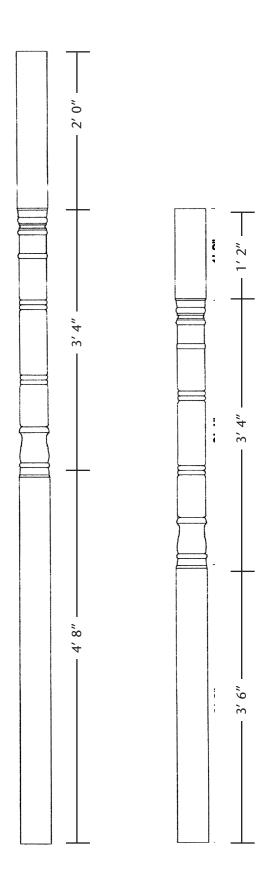

Paint Grade Wood Porch Posts

4" x 4" x 8' Colonial 4" x 4" x 10' Colonial 5" x 5" x 8' Colonial 5" x 5" x 10' Colonial 6" x 6" x 8' Colonial 6" x 6" x 10' Colonial

NET SIZES:

4'' = 3-1/4''

5'' = 4-1/4''

6" = 5-1/4"

LOAD BEARING CAPACITY

4'' = 3,000 lbs.

5'' = 6,000 lbs.

6'' = 7,500 lbs.


INSTALLATION—After

Cutting the post to desired length, apply a waterproof sealer and prime coat on all exposed areas. Aspexially on the ends.



COLUMNS


COLUMNS

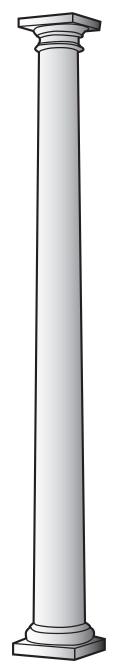

STOCK ITEM

Smooth Round Fiberglass Columns


9
8" x 6'
8" x 8'
8" x 10'
10" x 8'
10" x 10'
10" x 12'
12" x 8'
12" x 10'
12" x 12'

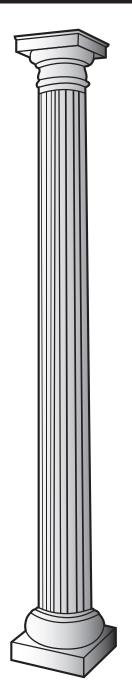

SPECIAL ORDER

Fluted Round Fiberglass Columns


8" x 8'
8" x 10'
8" x 12'
10" x 8'
10" x 10'
10" x 12'
12" x 8'
12" x 10'
12" x 12'

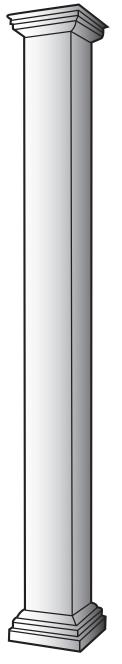

STOCK ITEM

Dura Glass—Non-Tapered Square Poly—Classic Columns

8" x 12' 10" x 12'

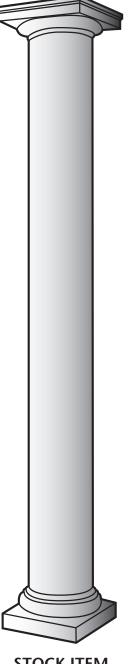

STOCK ITEM

Permalite—Non-Tapered **Round Columns**

8" x 10' 10" x 10' GRADE Wood mouldings are available in two grades. "N Grade" is intended for natural or clear finishes and the exposed face must be of one single piece. "P Grade" is intended for opaque paint finishes or overlays and can be finger jointed and or edge glued.

These grades may have a few minor characteristics such as light checks, small pitch pockets, light torn grain, occasional medium stain or a small amount of medium pitch. A serious combination of these is not admissible in any one piece. The number and extent of characteristics permitted varies as the area of the piece increases or diminishes.

N-GRADE (suitable for natural, stain, paint, or enamel finish). On the basis of net 2" face—12' long this grade will admit the following characteristics or their equivalent:

A. A small spot of torn grain, one foot of medium pitch, light skip in dressing on back, or B. One small and one very small pitch pocket, or C. One short, tight season check and a light snipe at one end, or D. Medium stain in occasional (10%) pieces for one third the area in an otherwise perfect piece.

Characteristics that will not show when piece is laid shall not be given the same consideration as characteristics elsewhere.

P-GRADE (paint or overlay grade) The same quality as N-Grade except stain is no defect. Glue joints (laminated or finger joints) must be precision machined and assembled with tight joints. Patching, filling or plugging is permitted providing a paintable surface results.

LENGTHS Random lengths shall be 3 to 20 feet in multiples of one foot. Not over 15% of any one item shall be under 8 feet. When computing the percentage of shorts in casing and stops, pieces 7' in length will be considered long lengths.

Specified lengths of cut to length window and door trim shall be graded as completely usable.

Finger and/or laminated jointed mouldings may be ordered in specified lengths with not over 15% trim backs permitted in any one item.

Specified Lengths We reserve the option to charge a 25% premium on specified lengths of items normally sold on a random length basis. This policy applies mostly to Solid Pine, Oak and Hemlock mouldings.

ADHESIVES Adhesives used in finger joints or laminations shall meet the dry used adhesive performance requirements of ASTM D-3110-82 (or latest revision) "Standard Specification for Adhesives Used in Non-Structural Glued Lumber Products."

In situations where a Wet-Use adhesive is required, it shall be so specified, acknowledged and invoiced.

BUNDLING shall be in accordance with the Standard Wood Moulding and Millwork Producers Association Schedule.

MANUFACTURING TOLERANCES Thickness and width + or - 1/32"

DEFINITIONS Definitions of characteristics permitted in wood mouldings shall be those of the National Grading Rules for softwood lumber.

Settlement Provisions In determining compliance with purchase specifications and of effecting settlement of invoices between buyers and sellers, each item of a shipment shall be considered as of the grade invoiced if upon re-inspection 95% thereof or more is found to be of said grade or better.



Green's the Thing

At Trimco Millwork, we're not just trying to conserve energy and reduce our own carbon footprint, we're taking green to the next level by offering the finest, environmentally responsible building materials available. We offer a wide range of products that are made from recycled materials or are recycleable, as well as products from manufacturers that support the green initiatives of the organizations you see on this page. We are constantly searching for and adding high quality, green products to our inventory.

Go Green

To make it easier for our customers to find greener building materials we have developed GO GREEN, a selection of products that are easier on the earth through their manufacture, performance or use. Our GO GREEN offerings can help you meet your green product requirements.

Building Green With Trimco

The products listed below are a sample of the Go Green products we offer at Trimco Millwork:

MOULDING

Pac-Fit / Can Trim - MDF

Fred Tebb & Sons - Knotty Alder

Ferche - Oak

Sierra Pacific - Frames

Brightwood - Hemlock, Solid Pine,

& Finger Joint

DOORS

Therma Tru - Doors

Lynden Doors - Interior Doors

ODL - Door Lites

WOODGRAIN DOOR

SIMPSON DOOR

SIMPSON STRONG TIE

KROSSWOOD



For more information about GO GREEN products contact us at



1835 Commerce Ave. Boise, ID 83705

Phone: 208-336-9000 • Fax: 208-384-1658

Toll Free: 1-800-733-0312

A Division of Hoff Companies, Inc.

OTHER PRODUCTS FROM TRIMCO





























































